

Mini installation beacon / Beacon Multicolour

MC55 RGB M12-plug 10-30VDC





| MECHANICAL DATA | | |
|-----------------------------|---------------------|--|
| Height | 71 mm | |
| Diameter | 55 mm | |
| Materials | PC PC/ABS | |
| Dome colour | Clear | |
| Housing colour | Black | |
| Protection category | IP65 | |
| Connection | M12 plug 5-pole | |
| Cable length | 100 mm | |
| Tension relief | Pull-out protection | |
| Type of fixing | Built-in mounting | |
| Working temperature minimum | -20°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 72 g | |
| Product weight | 72 g | |

| ELECTRICAL DATA | | |
|-----------------------------|--------------------------------|--|
| Operating voltage | 10-30V | |
| Operating voltage type | DC | |
| Operating voltage tolerance | +/- 0% | |
| Rated operational voltage | 24 VDC | |
| Rated operational current | 60 mA | |
| Rated inrush current | <700mA | |
| Protection class | Protection class 2 | |
| Pollution degree | 3 In the connection area: 2 | |

| OPTICAL DATA | |
|----------------------|------------------|
| Light source | LED |
| Light colour | MC 7 colours |
| Optical signal image | Permanent |
| Service life optical | 50,000 h maximum |

| APPROVAL DATA | | |
|-----------------------------|-----|--|
| Conforms with CE | Yes | |
| WEEE | Yes | |
| Conform with ATEX-directive | No | |
| Conforms with CCC | No | |
| Conforms with UL | No | |
| Conforms with FCC | No | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




Mini installation beacon / Beacon Multicolour

MC55 RGB M12-plug 10-30VDC

| Conforms with IC | No |
|-------------------------------|-----------------------|
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | 25 years |
| Conforms with VdS | No |

DRAWING

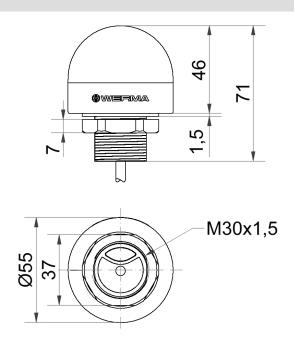

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.