

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
CD	(10A)	66 - 74
CDD	(10A)	76 - 83
CDC	(16A)	104 - 106
CCE	(16A)	130 - 135
CMCE	(16A)	137 - 145
CQE	(16A)	168 - 173
CQEE	(16A)	176 - 177
CQ	(10A/16A)	186 - 193
CX 8/24	(16A/10A)	194
CX 6/36 *	(10A)	198
CX 12/2 *	(10A)	199
CX 6/6 *	(16A)	206
MIXO	(10A/16A)	271 - 306

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool positioner - gauge



insertion tool - removal tools replacement tip






description	part No.	part No.
crimping tool for 10A and 16A contacts DANIELS AF8 model (turret excluded)	CCPZ MIL	
positioner inserts (see note) for 10A contacts (CDF and CDM series) for 16A contacts (CCF and CCM series)	CCTP 10 CCTP 16	
"go / no go" control gauge to verify indenter closure (see note)	CCPNP	
insertion tool for insertion of the contacts into the inserts for crimped contacts up to 0,75 mm ²		CCINA
removal tools for the extraction of contacts from the inserts for 10A contacts ¹⁾ for 16A contacts ²⁾		CCES CQES
replacement tip for CCES removal tool		CCPR RN

- 1) for CQ, CD, CDD, CX inserts (10A auxiliary contacts) and MIXO module (10A)
- 2) for CQ, CQE, CQEE, CCE, CMCE inserts (excluded 16+2), MIXO module (16A), CX6/6 (16A) and CDC. For CMCE (16+2), CX inserts (contacts 16A insert CX 8/24) using a flat 3 mm screwdriver.

Notes:
Positioner / Head turret
 conforms to international standard MIL-C-22520/1
 - An interchangeable and indispensable accessory of the CCPZ MIL crimping tool, it precisely positions the contact where crimping is performed. Each series of contacts requires its own turret.

"go / no go" control gauge
 conforms with international standard MIL-C-22520/3
 - A tool used to periodically check that the crimping tool meets standard requirements.

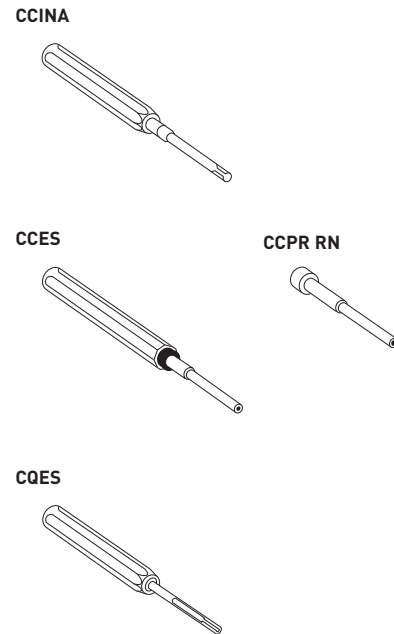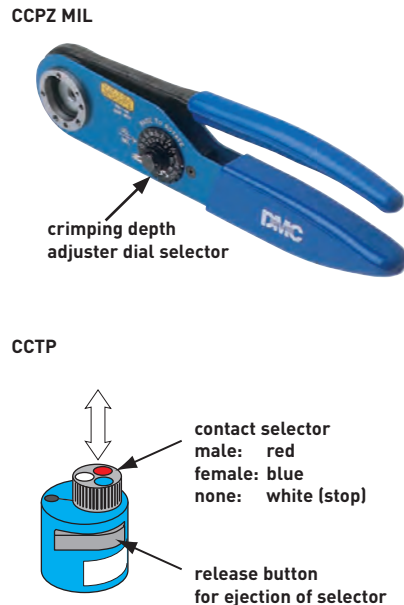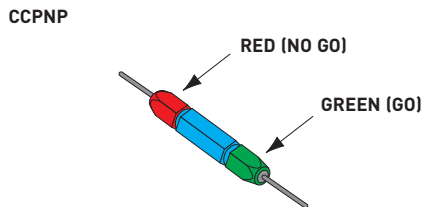

16A - CONTACT HEAD TURRET / POSITIONER		0,14	0,25	0,34	0,5	0,75	1,0	1,5	2,5	3,0	4,0	conductor section
CCMA - CCFA	CCMD - CCFD	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	
red	blue											AWG
male	female	26	24	22	20	18	17	16	14	12	12	
0,3	0,3	5	5	6								crimping depth adjuster selector
0,5	0,5		6	6	7							
0,7	0,7			6	6	7						
1,0	1,0			6	6	7	7					
1,5	1,5				6	7	7	8				
2,5	2,5					6	6	7	7			
3,0	3,0						6	7	7			
4,0	4,0								7	8		

10A - CONTACT HEAD TURRET / POSITIONER		0,14	0,25	0,34	0,5	0,75	1,0	1,5	2,5	conductor section
CDMA - CDFA	CDMD - CDFD	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	mm ²	
red	blue									
male	female	26	24	22	20	18	17	16	14	AWG
0,3	0,3	5	5	6						crimping depth adjuster selector
0,5	0,5				6					
0,7	0,7					6				
1,0	1,0						6			
1,5	1,5							7		
2,5	2,5								7	