

# SNAPConnect<sup>®</sup> Devices



# SNAPConnect® Devices

Installation Efficiency

## Labor Savings Save up to 5 Minutes



### Save 1 Minute

Rough-in the SNAPConnect® terminal instead of pigtails.



### Save Over 3 Minutes

Remove protective packaging and SNAPConnect® device.



### Trim-Out In Under 1 Minute

Secure mounting screws and attach wallplate.

## Features and Benefits

- SNAPConnect® Eliminates Exposed Live Terminals on the Device



### Power Indicating

Most often used to identify emergency circuits, the two LED power indicators identify faces with power and are visible in low light and bright light conditions.



### Tamper-Resistant

NEC® Sections 517.31(E) and 517.42(E) and NFPA 99, Health Care Facilities Code, Sections 6.7.2.3.5(B) and 6.7.6.3.2 require receptacles on the Essential Electrical System to be readily identifiable by color or wall plate markings. Also LED power indicators may provide instant, visual assurance that power is available at the receptacle.



### Isolated Ground

SNAPConnect® isolated ground devices provide a clean ground path for sensitive equipment. Devices are available with power indication and tamper-resistant.



### Surge Protection

SpikeShield® SNAPConnect® surge receptacles provide excellent point of use protection for sensitive electronic loads from everyday power spikes.



### USB Charger

SNAPConnect® USB chargers provide power in a standard single gang electrical opening. They are designed to provide maximum charging for portable electronics.



## Testers & Connectors




### 3-in-1 SNAPConnect® Tester

- Tests
  - proper wiring of SNAPConnect® terminals
  - proper wiring of standard receptacles
  - GFCI receptacles

### Right Angle Pigtailed Connectors

- Audible SNAP indicates solid connection
  - Secure, easy grip latch
- Inspection of power contacts
  - Clear terminal housing
  - No exposed metal
- Assembled in USA



#### No Special Tester Required

.085 inch keyhole accepts probe points found on the most common voltage testers and digital multi-meters

### SNAPConnect® Tester

Description	Catalog Number
Circuit Tester for SNAPConnect® receptacle terminals, GFCI and standard receptacles	<b>SNAPCTG</b>

### SNAPConnect® Right Angle Pigtailed Connectors for Receptacles

Description	Wire Type	General Use	Assembled in USA
6 inch wire connector	Solid	<b>SNAP1RA</b>	<b>SNAP1RNA</b>
6 inch wire with push-wire terminals		<b>SNAP1RAM2</b>	<b>SNAP1RNAM2</b>
6 inch wire connector	Stranded	<b>SNAP2RA</b>	<b>SNAP2RNA</b>
6 inch wire with push-wire terminals		<b>SNAP2RAM2</b>	<b>SNAP2RNAM2</b>
SNAP2RNA with 40 inch leads		—	<b>SNAP2RNAM1</b>
SNAP2RNA with 100 inch leads		—	<b>SNAP2RNAM3</b>

### SNAPConnect® Right Angle Pigtailed Connectors for Switches

Description	Wire Type	Catalog Number
Switch jumper/tester, single pole, illuminated	—	<b>SNAPSWJUMP</b>
Switch jumper/tester, 3 way, illuminated	—	<b>SNAP3WJUMP</b>
6 inch wire connector for use with	Solid	<b>SNAPSP1NA</b>
		<b>SNAPSP1NAM2</b>
		<b>SNAPSP1NA</b>
		<b>SNAPSP1NAM2</b>
6 inch wire connector for use with	Stranded	<b>SNAP3W1NA</b>
		<b>SNAP3W1NAM2</b>
		<b>SNAPSP2NA</b>
		<b>SNAPSP2NAM2</b>
6 inch wire connector for use with	Stranded	<b>SNAPSP2NA</b>
		<b>SNAPSP2NAM2</b>
		<b>SNAPSP2NA</b>
		<b>SNAPSP2NAM2</b>
6 inch wire connector for use with	Stranded	<b>SNAP3W2NA</b>
		<b>SNAP3W2NAM2</b>
		<b>SNAP3W2NA</b>
		<b>SNAP3W2NAM2</b>



# SNAPConnect® Devices

## Extra Heavy Duty Duplex Receptacles

### Features and Benefits

- Available in standard, hospital grade, tamper-resistant and LED power indicating versions
- High strength nylon for extra heavy use applications
- Stainless steel autoground

### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM



### Codes and Standards



#### 2020 National Electrical Code® and 2021 NFPA 99 Health Care Facilities Code

NEC® Sections 517.31(E) and 517.42(E) and NFPA 99, Health Care Facilities Code, Sections 6.7.2.3.5(B) and 6.7.6.3.2 require receptacles on the Essential Electrical System to be readily identifiable by color or wall plate markings. Also LED power indicators may provide instant, visual assurance that power is available at the receptacle.



### SNAPConnect® Extra Heavy Duty Duplex Receptacles

Description	Style	Color	15A 125V	20A 125V
Standard	Duplex	Ivory	<b>SNAP5262INA</b>	<b>SNAP5362INA</b>
		Light Almond	<b>SNAP5262LANA</b>	<b>SNAP5362LANA</b>
		White	<b>SNAP5262WNA</b>	<b>SNAP5362WNA</b>
Decorator	Duplex	Ivory	<b>SNAP2152IA</b>	<b>SNAP2162IA</b>
		Light Almond	<b>SNAP2152LAA</b>	<b>SNAP2162LAA</b>
		White	<b>SNAP2152WA</b>	<b>SNAP2162WA</b>
Standard with Finder Groove	Duplex	Ivory	<b>SNAP5262IA</b>	<b>SNAP5362IA</b>
		Light Almond	<b>SNAP5262LAA</b>	<b>SNAP5362LAA</b>
		White	<b>SNAP5262WA</b>	<b>SNAP5362WA</b>
Tamper-Resistant	Duplex	Ivory	<b>SNAP5262ITRA</b>	<b>SNAP5362ITRA</b>
		Light Almond	<b>SNAP5262LATRA</b>	<b>SNAP5362LATRA</b>
		White	<b>SNAP5262WTRA</b>	<b>SNAP5362WTRA</b>
Decorator	Duplex	Ivory	<b>SNAP2152ITRA</b>	<b>SNAP2162ITRA</b>
		Light Almond	<b>SNAP2152LATRA</b>	<b>SNAP2162LATRA</b>
		White	<b>SNAP2152WTRA</b>	<b>SNAP2162WTRA</b>
Tamper-Resistant with Split Circuit	Duplex	Ivory	<b>SNAP5262ISCTRA</b>	<b>SNAP5362ISCTRA</b>
		Light Almond	<b>SNAP5262LASCTRA</b>	<b>SNAP5362LASCTRA</b>
		White	<b>SNAP5262WSCTRA</b>	<b>SNAP5362WSCTRA</b>
Decorator	Duplex	Ivory	<b>SNAP2152ISCTRA</b>	<b>SNAP2162ISCTRA</b>
		Light Almond	<b>SNAP2152LASCTRA</b>	<b>SNAP2162LASCTRA</b>
		White	<b>SNAP2152WSCTRA</b>	<b>SNAP2162WSCTRA</b>
Standard with Power Indicating LED	Duplex	Ivory	<b>SNAP5262IL</b>	<b>SNAP5362IL</b>
		Light Almond	<b>SNAP5262LAL</b>	<b>SNAP5362LAL</b>
		White	<b>SNAP5262WL</b>	<b>SNAP5362WL</b>
Decorator	Duplex	Ivory	<b>SNAP2152IL</b>	<b>SNAP2162IL</b>
		Light Almond	<b>SNAP2152LAL</b>	<b>SNAP2162LAL</b>
		White	<b>SNAP2152WL</b>	<b>SNAP2162WL</b>
Tamper-Resistant with Power Indicating LED	Duplex	Ivory	<b>SNAP5262ILTRA</b>	<b>SNAP5362ILTRA</b>
		Light Almond	<b>SNAP5262LALTRA</b>	<b>SNAP5362LALTRA</b>
		White	<b>SNAP5262WLTRA</b>	<b>SNAP5362WLTRA</b>
Decorator	Duplex	Ivory	<b>SNAP2152ILTRA</b>	<b>SNAP2162ILTRA</b>
		Light Almond	<b>SNAP2152LALTRA</b>	<b>SNAP2162LALTRA</b>
		White	<b>SNAP2152WLTRA</b>	<b>SNAP2162WLTRA</b>

Note: Connectors sold separately, see page 3 for details.  
For Assembled in USA options, contact your Hubbell sales representative.

National Electrical Code and NEC are registered trademarks of National Fire Protection Association, Inc.



## Hospital Grade Extra Heavy Duty Duplex Receptacles



### Features and Benefits

- Available in standard, hospital grade, tamper-resistant and LED power indicating versions
- High strength nylon for extra heavy use applications
- Stainless steel autoground

### Applications

- Hospitals
- Healthcare Facilities
- Pre-Fab Assembly
- OEM

### Codes and Standards



#### 2020 National Electrical Code® and 2021 NFPA 99 Health Care Facilities Code

SNAPConnect® Hospital Grade TR receptacles can be installed in compliance with NEC® Section 517.18(C) and NFPA 99, Health Care Facilities Code, Section 6.3.2.2.1(D) requiring receptacles located within patient rooms, bathrooms, playrooms, activity rooms of designated pediatric locations, other than infant nurseries, to be listed and identified as tamper-resistant.

### SNAPConnect® Hospital Grade Extra Heavy Duty Duplex Receptacles

Description	Style	Color	15A 125V	20A 125V
Standard	Duplex	Ivory Light Almond White	SNAP8200INA SNAP8200LANA SNAP8200WNA	SNAP8300INA SNAP8300LANA SNAP8300WNA
	Decorator	Ivory Light Almond White	SNAP2172IA SNAP2172LAA SNAP2172WA	SNAP2182IA SNAP2182LAA SNAP2182WA
Standard with Finder Groove	Duplex	Ivory Light Almond White	SNAP8200IA SNAP8200LAA SNAP8200WA	SNAP8300IA SNAP8300LAA SNAP8300WA
Tamper-Resistant	Duplex	Ivory Light Almond White	SNAP8200ITRA SNAP8200LATRA SNAP8200WTRA	SNAP8300ITRA SNAP8300LATRA SNAP8300WTRA
	Decorator	Ivory Light Almond White	SNAP2172ITRA SNAP2172LATRA SNAP2172WTRA	SNAP2182ITRA SNAP2182LATRA SNAP2182WTRA
Tamper-Resistant with Split Circuit	Duplex	Ivory Light Almond White	SNAP8200ISCTRA SNAP8200LASCTRA SNAP8200WSCTRA	SNAP8300ISCTRA SNAP8300LASCTRA SNAP8300WSCTRA
	Decorator	Ivory Light Almond White	SNAP2172ISCTRA SNAP2172LASCTRA SNAP2172WSCTRA	SNAP2182ISCTRA SNAP2182LASCTRA SNAP2182WSCTRA
Standard with Power Indicating LED	Duplex	Ivory Light Almond White	SNAP8200IL SNAP8200LAL SNAP8200WL	SNAP8300IL SNAP8300LAL SNAP8300WL
	Decorator	Ivory Light Almond White	SNAP2172IL SNAP2172LAL SNAP2172WL	SNAP2182IL SNAP2182LAL SNAP2182WL
Tamper-Resistant with Power Indicating LED	Duplex	Ivory Light Almond White	SNAP8200ILTRA SNAP8200LALTRA SNAP8200WLTRA	SNAP8300ILTRA SNAP8300LALTRA SNAP8300WLTRA
	Decorator	Ivory Light Almond White	SNAP2172ILTRA SNAP2172LALTRA SNAP2172WLTRA	SNAP2182ILTRA SNAP2182LALTRA SNAP2182WLTRA



Note: Connectors sold separately, see page 3 for details.  
For Assembled in USA options, contact your Hubbell sales representative.

National Electrical Code and NEC are registered trademarks of National Fire Protection Association, Inc.






# SNAPConnect® Devices

## Permanently Marked Receptacles

### Features and Benefits

- For use with Automatic Receptacle Control (ARC) systems
- Permanent power symbol  and CONTROLLED remains clearly visible after installed
- Control both outlets per device, or just one for 50% controlled applications

### Applications


- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM



### Codes and Standards



#### 2020 National Electrical Code®

NEC® Section 406.3(E) requires that all nonlocking, 125 V, 15A and 20A receptacles controlled by an automatic control device or by an automatic energy management system must be marked with the  symbol and the word "CONTROLLED".



#### ASHRAE Standard 90.1 2019

Standard 90.1 requires that at least 50 percent of all 125V, 15A and 20A receptacles in private offices, open offices and classrooms be controlled by an automatic control device. Controlled receptacles need to be marked to differentiate them from non-controlled receptacles.



#### California Title 24 Building Energy Efficiency Standards 2019

California Title 24 requires that in all buildings, both controlled and uncontrolled 120V receptacles shall be provided in each private office, open office area, reception lobby, conference room, kitchenette in office spaces and copy room.



### SNAPConnect® Permanently Marked Duplex Receptacles

Description	Color	Standard		Tamper-Resistant	
		15A 125V	20A 125V	15A 125V	20A 125V
Standard One Face Controlled Split Circuit Snap	Ivory	<b>SNAP5262C1I</b>	<b>SNAP5362C1I</b>	<b>SNAP5262C1ITRA</b>	<b>SNAP5362C1ITRA</b>
	Light Almond	<b>SNAP5262C1LA</b>	<b>SNAP5362C1LA</b>	<b>SNAP5262C1LATRA</b>	<b>SNAP5362C1LATRA</b>
	White	<b>SNAP5262C1W</b>	<b>SNAP5362C1W</b>	<b>SNAP5262C1WTRA</b>	<b>SNAP5362C1WTRA</b>
Standard Both Faces Controlled	Ivory	<b>SNAP5262C2I</b>	<b>SNAP5362C2I</b>	<b>SNAP5262C2ITRA</b>	<b>SNAP5362C2ITRA</b>
	Light Almond	<b>SNAP5262C2LA</b>	<b>SNAP5362C2LA</b>	<b>SNAP5262C2LATRA</b>	<b>SNAP5362C2LATRA</b>
	White	<b>SNAP5262C2W</b>	<b>SNAP5362C2W</b>	<b>SNAP5262C2WTRA</b>	<b>SNAP5362C2WTRA</b>
Decorator One Face Controlled Split Circuit Snap	Ivory	<b>SNAP2152C1I</b>	<b>SNAP2162C1I</b>	<b>SNAP2152C1ITRA</b>	<b>SNAP2162C1ITRA</b>
	Light Almond	<b>SNAP2152C1LA</b>	<b>SNAP2162C1LA</b>	<b>SNAP2152C1LATRA</b>	<b>SNAP2162C1LATRA</b>
	White	<b>SNAP2152C1W</b>	<b>SNAP2162C1W</b>	<b>SNAP2152C1WTRA</b>	<b>SNAP2162C1WTRA</b>
Decorator Both Faces Controlled	Ivory	<b>SNAP2152C2I</b>	<b>SNAP2162C2I</b>	<b>SNAP2152C2ITRA</b>	<b>SNAP2162C2ITRA</b>
	Light Almond	<b>SNAP2152C2LA</b>	<b>SNAP2162C2LA</b>	<b>SNAP2152C2LATRA</b>	<b>SNAP2162C2LATRA</b>
	White	<b>SNAP2152C2W</b>	<b>SNAP2162C2W</b>	<b>SNAP2152C2WTRA</b>	<b>SNAP2162C2WTRA</b>

Note: Connectors sold separately, see page 3 for details.  
Additional colors available, please see our full line catalog.



### Permanent Controlled Receptacle Labels

Description	Catalog Number
For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling, 60 labels of each per pack.	<b>CL60</b>

National Electrical Code and NEC are registered trademarks of National Fire Protection Association, Inc.  
ASHRAE logo is a registered trademark of the American Society of Heating, Refrigeration, and Air-Conditioning Engineers, Inc.



## Extra Heavy Duty Single Receptacles



### Features and Benefits

- Available in tamper-resistant, standard and hospital grade
- High strength nylon for extra heavy use applications
- Stainless steel autoground

### Applications

- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

### Codes and Standards



#### 2020 National Electrical Code\*

SNAPConnect® TR receptacles can be installed in compliance with NEC® Sections 406.12 and 406.4(D)(5) requiring 15A and 20A, 125V and 250V tamper-resistant receptacles in dwelling units; child care facilities; guest rooms and guest suites; preschool and educational facilities; business offices, corridors and waiting rooms of clinics, of medical and dental offices, and of outpatient facilities; waiting areas of airport, train and bus terminals; gymnasiums and skating rinks; auditoriums; dormitory units; and assisted living facilities.

### SNAPConnect® Extra Heavy Duty Single Receptacles

Description	Color	15A 125V	20A 125V	15A 250V	20A 250V
Standard	Ivory	<b>SNAP5261I</b>	<b>SNAP5361I</b>	-	-
	Light Almond	<b>SNAP5261LA</b>	<b>SNAP5361LA</b>	-	-
	White	<b>SNAP5261W</b>	<b>SNAP5361W</b>	-	-
Tamper-Resistant	Ivory	<b>SNAP5261ITR</b>	<b>SNAP5361ITR</b>	<b>SNAP5661ITR</b>	<b>SNAP5461ITR</b>
	Light Almond	<b>SNAP5261LATR</b>	<b>SNAP5361LATR</b>	<b>SNAP5661LATR</b>	<b>SNAP5461LATR</b>
	White	<b>SNAP5261WTR</b>	<b>SNAP5361WTR</b>	<b>SNAP5661WTR</b>	<b>SNAP5461WTR</b>

### SNAPConnect® Hospital Grade ● Single Receptacles

Description	Color	15A 125V	20A 125V
Standard	Ivory	<b>SNAP8210I</b>	<b>SNAP8310I</b>
	Light Almond	<b>SNAP8210LA</b>	<b>SNAP8310LA</b>
	White	<b>SNAP8210W</b>	<b>SNAP8310W</b>
Tamper-Resistant	Ivory	<b>SNAP8210ITR</b>	<b>SNAP8310ITR</b>
	Light Almond	<b>SNAP8210LATR</b>	<b>SNAP8310LATR</b>
	White	<b>SNAP8210WTR</b>	<b>SNAP8310WTR</b>

Note: Connectors sold separately, see page 3 for details.  
Additional colors available, please see our full line catalog.



# SNAPConnect® Devices

## Ground Fault Receptacles

### Features and Benefits

- Heavy duty specification grade
- Shallow box depth creates more room for wiring
- UL Federal Specification WC596
- Tamper-Resistant and Weather Resistant versions meet NEC®
- Flashing red LED ground fault indicator signals end of life

### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM



### SNAPConnect® Heavy Duty Commercial Ground Fault Receptacles

Description	Color	Hospital Grade ●		Specification Grade	
		15A 125V	20A 125V	15A 125V	20A 125V
Standard	Ivory	<b>GFRST82SNAPI</b>	<b>GFRST83SNAPI</b>	<b>GFRST15SNAPI</b>	<b>GFRST20SNAPI</b>
	Light Almond	<b>GFRST82SNAPLA</b>	<b>GFRST83SNAPLA</b>	<b>GFRST15SNAPLA</b>	<b>GFRST20SNAPLA</b>
	White	<b>GFRST82SNAPW</b>	<b>GFRST83SNAPW</b>	<b>GFRST15SNAPW</b>	<b>GFRST20SNAPW</b>
Tamper-Resistant, Weather Resistant	Ivory	<b>GFTWRST82SNAPI</b>	<b>GFTWRST83SNAPI</b>	<b>GFTWRST15SNAPI</b>	<b>GFTWRST20SNAPI</b>
	Light Almond	<b>GFTWRST82SNAPLA</b>	<b>GFTWRST83SNAPLA</b>	<b>GFTWRST15SNAPLA</b>	<b>GFTWRST20SNAPLA</b>
	White	<b>GFTWRST82SNAPW</b>	<b>GFTWRST83SNAPW</b>	<b>GFTWRST15SNAPW</b>	<b>GFTWRST20SNAPW</b>

Note: Connectors sold separately, see page 3 for details.





## Surge Protection & Isolated Ground Receptacles



### Features and Benefits

- Heavy duty specification grade
- Shallow box depth creates more room for wiring
- UL Federal Specification WC596
- Tamper-Resistant and Weather Resistant versions meet NEC\*
- Flashing red LED ground fault indicator signals end of life

### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly
- OEM

### SNAPConnect® Surge Protection Receptacles

Description	Color	Hospital Grade ●		Specification Grade	
		15A 125V	20A 125V	15A 125V	20A 125V
Tamper-Resistant with Power Indicating LED	Blue	<b>SNAP8262S</b>	<b>SNAP8362S</b>	<b>SNAP5262S</b>	<b>SNAP5362S</b>
	Ivory	<b>SNAP8262IS</b>	<b>SNAP8362IS</b>	<b>SNAP5262IS</b>	<b>SNAP5362IS</b>
	Light Almond	<b>SNAP8262LAS</b>	<b>SNAP8362LAS</b>	<b>SNAP5262LAS</b>	<b>SNAP5362LAS</b>
	White	<b>SNAP8262WS</b>	<b>SNAP8362WS</b>	<b>SNAP5262WS</b>	<b>SNAP5362WS</b>



### SNAPConnect® Isolated Ground Receptacles

Description	Color	Style	Hospital Grade ●		Specification Grade	
			15A 125V	20A 125V	15A 125V	20A 125V
Tamper-Resistant	Orange Red	Duplex	<b>SNAP8200IGTRA</b> <b>SNAP8200RIGTR</b>	<b>SNAP8300IGTRA</b> <b>SNAP8300RIGTR</b>	<b>SNAP5262IGTRA</b> —	<b>SNAP5362IGTRA</b> —
	Orange Red	Decorator	<b>SNAP2172IGTRA</b> <b>SNAP2172RIGTR</b>	<b>SNAP2182IGTRA</b> <b>SNAP2182RIGTR</b>	<b>SNAP2152IGTRA</b> —	<b>SNAP2162IGTRA</b> —
Standard with Power Indicating LED	Orange Red	Duplex	<b>SNAP8200IGL</b> <b>SNAP8200RIGL</b>	<b>SNAP8300IGL</b> <b>SNAP8300RIGL</b>	<b>SNAP5262IGL</b> —	<b>SNAP5362IGL</b> —
	Orange Red	Decorator	<b>SNAP2172IGL</b> <b>SNAP2172RIGL</b>	<b>SNAP2182IGL</b> <b>SNAP2182RIGL</b>	<b>SNAP2152IGL</b> —	<b>SNAP2162IGL</b> —
Tamper-Resistant with Power Indicating LED	Orange Red	Duplex	<b>SNAP8200IGLTRA</b> <b>SNAP8200RIGLTRA</b>	<b>SNAP8300IGLTRA</b> <b>SNAP8300RIGLTRA</b>	<b>SNAP5262IGLTRA</b> —	<b>SNAP5362IGLTRA</b> —
	Orange Red	Decorator	<b>SNAP2172IGLTRA</b> <b>SNAP2172RIGLTRA</b>	<b>SNAP2182IGLTRA</b> <b>SNAP2182RIGLTRA</b>	<b>SNAP2152IGLTRA</b> —	<b>SNAP2162IGLTRA</b> —



Note: Connectors sold separately, see page 3 for details.



# SNAPConnect® Devices

## USB Charger Duplex Receptacles

### Features and Benefits

- Fast charge USB Type-C port designed for more charging speed
- 3A, 5V DC fast charge up to 9V USB
- Charge multiple devices simultaneously
- Green LED indicates USB charging
- Heavy duty stainless steel ports rated for 10,000 cord insertions and removals

### Applications

- Universities
- Hotels
- Hospitals/Medical Labs
- Restaurants
- Airports
- Classrooms
- Residential



This outlet is capable of delivering up to 3 Amps, 5V DC of USB power. Charger can increase output from 5 volts to 9 volts, depending on the phone model. If multiple portable devices are plugged in the individual ports will allocate power as determined by the portable devices. Suitable for use on circuits with AFCI and GFCI protection.




### SNAPConnect® USB Charger Duplex Receptacles

Description	Color	Tamper-Resistant	
		15A 125V	20A 125V
Hospital Grade ● USB Charger One USB Type A and one Type-C port, 3 Amp up to 9 Volt USB output	Black	<b>SNAP8200UACBK</b>	<b>SNAP8300UACBK</b>
	Brown	<b>SNAP8200UAC</b>	<b>SNAP8300UAC</b>
	Gray	<b>SNAP8200UACGY</b>	<b>SNAP8300UACGY</b>
	Ivory	<b>SNAP8200UACI</b>	<b>SNAP8300UACI</b>
	Light Almond	<b>SNAP8200UACLA</b>	<b>SNAP8300UACLA</b>
	Red	<b>SNAP8200UACR</b>	<b>SNAP8300UACR</b>
	White	<b>SNAP8200UACW</b>	<b>SNAP8300UACW</b>
Commercial Grade USB Charger One USB Type A and one Type-C port, 3 Amp up to 9 Volt USB output	Black	<b>SNAP15UACBK</b>	<b>SNAP20UACBK</b>
	Brown	<b>SNAP15UAC</b>	<b>SNAP20UAC</b>
	Gray	<b>SNAP15UACGY</b>	<b>SNAP20UACGY</b>
	Ivory	<b>SNAP15UACI</b>	<b>SNAP20UACI</b>
	Light Almond	<b>SNAP15UACLA</b>	<b>SNAP20UACLA</b>
	White	<b>SNAP15UACW</b>	<b>SNAP20UACW</b>

Note: Connectors sold separately, see page 3 for details.



## Specification Grade Toggle and Decorator Switches

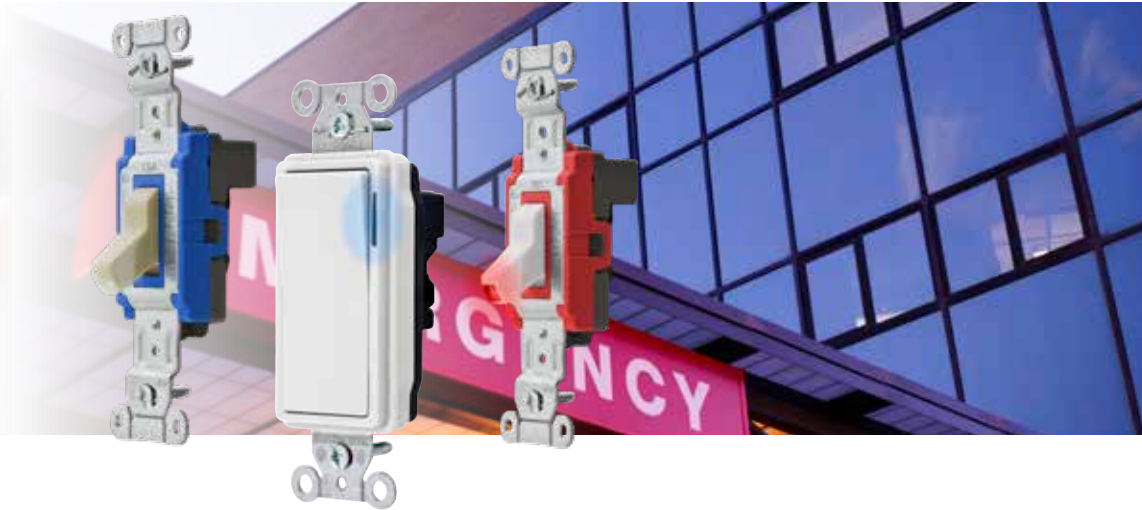

### Features and Benefits


- High strength nylon toggle or thermoplastic rocker for heavy use applications
- Stainless steel autoground
- Incorporates LED technology for illuminated and pilot light

### Applications

- Healthcare Facilities
- Education
- Hospitality
- Commercial Construction
- Pre-Fab Assembly


### SNAPConnect® Specification Grade Toggle Switches

Description	Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Toggle	Ivory	<b>SNAP1201INA</b>	<b>SNAP1203INA</b>	<b>SNAP1221INA</b>	<b>SNAP1223INA</b>
	Light Almond	<b>SNAP1201LANA</b>	<b>SNAP1203LANA</b>	<b>SNAP1221LANA</b>	<b>SNAP1223LANA</b>
	White	<b>SNAP1201WNA</b>	<b>SNAP1203WNA</b>	<b>SNAP1221WNA</b>	<b>SNAP1223WNA</b>
Illuminated blue LED, light ON with load OFF	Ivory	<b>SNAP1201ILINA</b>	<b>SNAP1203ILINA</b>	<b>SNAP1221ILINA</b>	<b>SNAP1223ILINA</b>
	Red	<b>SNAP1201ILRNA</b>	<b>SNAP1203ILRNA</b>	<b>SNAP1221ILRNA</b>	<b>SNAP1223ILRNA</b>
	White	<b>SNAP1201ILWNA</b>	<b>SNAP1203ILWNA</b>	<b>SNAP1221ILWNA</b>	<b>SNAP1223ILWNA</b>
Pilot red LED, light ON with load ON	Ivory	<b>SNAP1201PLINA</b>	—	<b>SNAP1221PLINA</b>	—
	Red	<b>SNAP1201PLRNA</b>	—	<b>SNAP1221PLRNA</b>	—
	White	<b>SNAP1201PLWNA</b>	—	<b>SNAP1221PLWNA</b>	—



### SNAPConnect® Specification Grade Decorator Switches

Description	Color	15A, 120-277V AC		20A, 120-277V AC	
		Single Pole	Three Way	Single Pole	Three Way
Rocker	Ivory	<b>SNAP2101INA</b>	<b>SNAP2103INA</b>	<b>SNAP2121INA</b>	<b>SNAP2123INA</b>
	Light Almond	<b>SNAP2101LANA</b>	<b>SNAP2103LANA</b>	<b>SNAP2121LANA</b>	<b>SNAP2123LANA</b>
	White	<b>SNAP2101WNA</b>	<b>SNAP2103WNA</b>	<b>SNAP2121WNA</b>	<b>SNAP2123WNA</b>
Illuminated blue LED, light ON with load OFF	Ivory	<b>SNAP2101ILINA</b>	<b>SNAP2103ILINA</b>	<b>SNAP2121ILINA</b>	<b>SNAP2123ILINA</b>
	Red	<b>SNAP2101ILRNA</b>	<b>SNAP2103ILRNA</b>	<b>SNAP2121ILRNA</b>	<b>SNAP2123ILRNA</b>
	White	<b>SNAP2101ILWNA</b>	<b>SNAP2103ILWNA</b>	<b>SNAP2121ILWNA</b>	<b>SNAP2123ILWNA</b>
Pilot Red LED, light ON with load ON	Ivory	<b>SNAP2101PLINA</b>	—	<b>SNAP2121PLINA</b>	—
	Red	<b>SNAP2101PLRNA</b>	—	<b>SNAP2121PLRNA</b>	—
	White	<b>SNAP2101PLWNA</b>	—	<b>SNAP2121PLWNA</b>	—



Note: Connectors sold separately, see page 3 for details.





# SNAPConnect® Devices

**HUBBELL®**  
Wiring Device-Kellems

## Healthcare and Education Product Solutions



Hubbell's in-depth virtual tours are designed to graphically and innovatively demonstrate where and how Hubbell's full line of wiring devices for power, data, voice and multimedia are deployed.

### Hubbell Healthcare eTour

Users can navigate their way through nine specific areas of a virtual hospital. There are 20 unique spaces where Hubbell product solutions are identified at work.

## Twist-Lock® Edge Series

Hubbell's innovative Twist-Lock® Edge Series receptacles with screwless terminations are the fastest devices to terminate on the market.

### Features

- Strong spring continues to apply pressure as strands relax
- No exposed metal on receptacles, allowing more devices to be installed closer together
- No torque screwdrivers required for wiring



## Available Literature

Hubbell offers an extensive literature library for product support. Downloadable PDFs are available on line.



Education Application Guide




Healthcare Application Guide



Installation Efficiency Guide



Entertainment Product Solution Guide



Twist-Lock® Edge Series

**HUBBELL®**  
Wiring Device-Kellems

[hubbell.com/wiringdevice-kellems/en](http://hubbell.com/wiringdevice-kellems/en)

