


LIGHTING

CERTILITE® V SERIES



VM3/VM4 CATALOG ORDERING LOGIC

CertiLite® Catalog Number Logic; 50-250 Low Wattage (Mogul Base) HID Fixtures

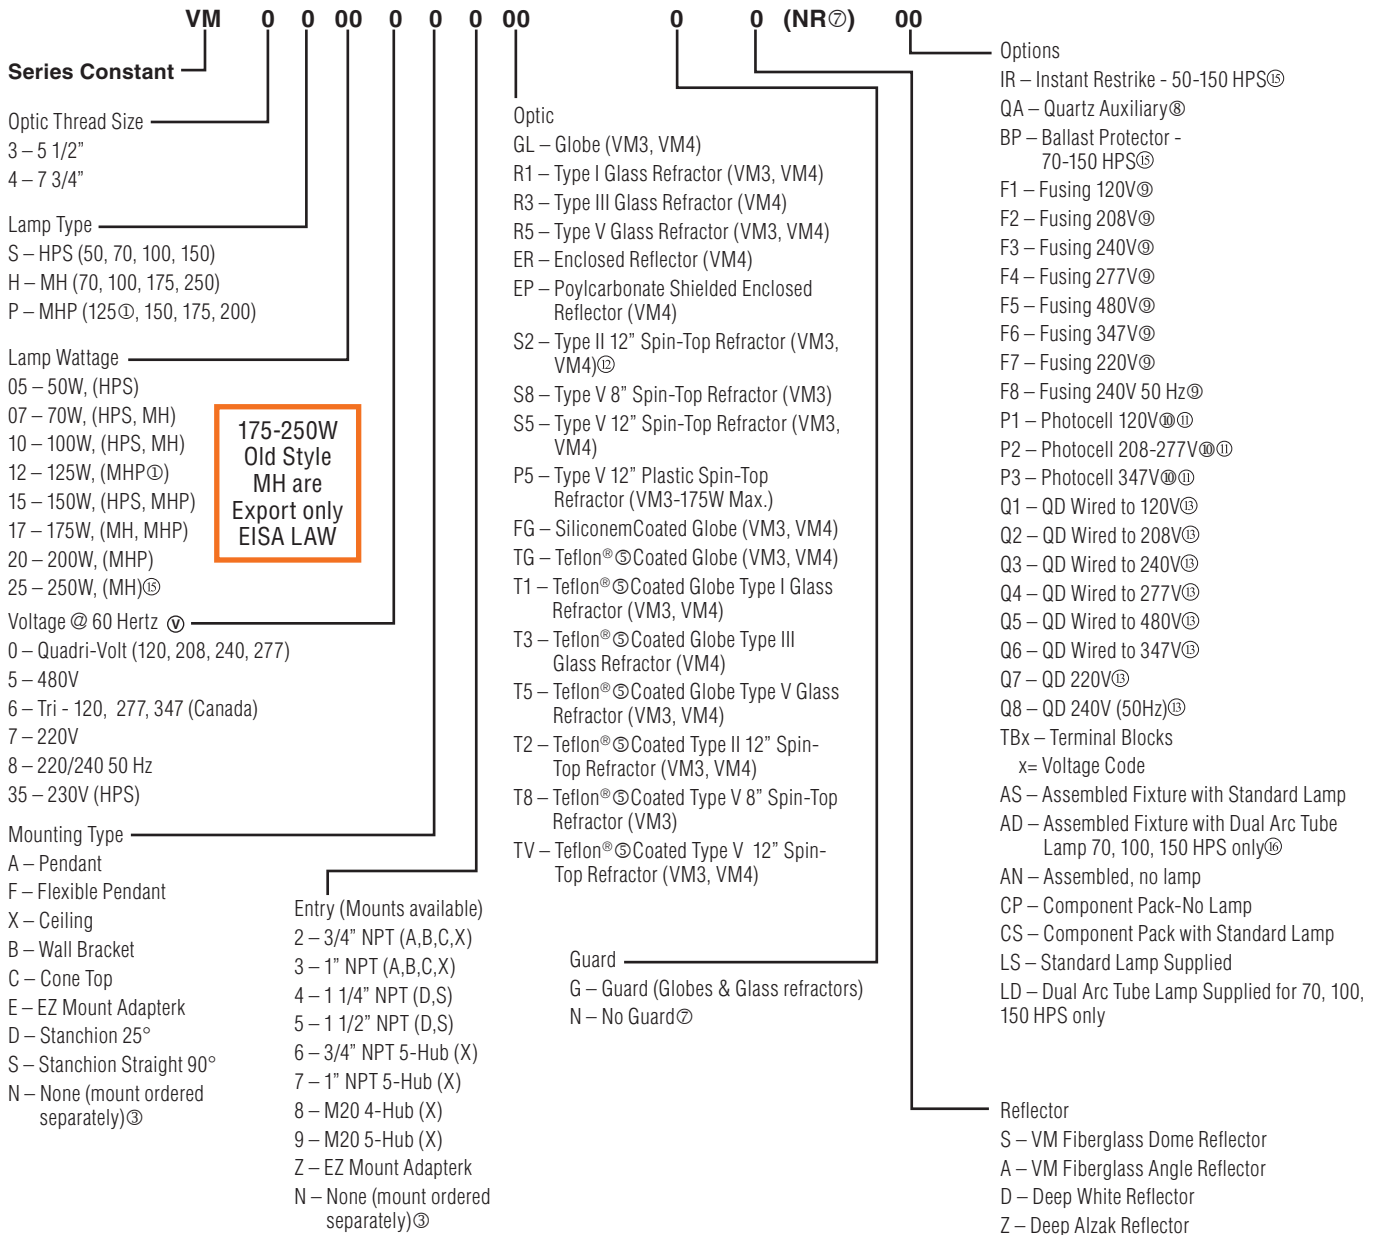

① Special order lamp type/wattage not shown in grids, minimums apply.
 ② Completes as "EZ", conduit mounting boxes ordered separately.
 ③ Silicone coated globe for additional impact protection.
 ④ Teflon® is a registered trademark of DuPont, Inc. Consult factory for available lamp and voltage combinations.
 ⑤ Restricted Breathing - See L84 for more information.
 ⑥ Order Guards for Spin-Tops & VMER40 separately.

⑦ QA not suitable for Class I, Div. 2/Zone 2 applications; consult factory for other hazardous applications.
 ⑧ Fusing not for Marine or Canadian installations.
 ⑨ Photo cells for Class I, Div. 2 only, or C1Z2 nR not Class II.
 ⑩ Field connection to proper tap in case of Multitap Ballasts.
 ⑪ Not for use with wall or straight (90°) Stanchion.
 ⑫ QD = Quick Disconnect. Allows easy tank removal for maintenance.

⑬ Electrician simply unplugs de-energized ballast from supply circuit. 220V 60Hz or 230V 50Hz used with QA-requires VM5 tank.
 ⑭ IR and BP cannot be ordered together.
 ⑮ Not available with IR or QA. c Ⓢ us



HIGH PRESSURE SODIUM, 50-150W MOGUL BASE HID



Pendant
w/ 5-1/2"
Globe & Guard



Flexible Pendant
w/ 5-1/2"
Refractor & Guard



Pendant
w/ 7-3/4"
Globe & Guard



Flexible Pendant
w/ 7-3/4"
Refractor & Guard



Pendant
w/ Enclosed Reflector

Class I, Div. 2, Groups A,B,C,D[Ⓢ]
Class I, Zone 2, Groups IIC, IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III
Suitable for wet locations
NEMA 3, 4, 4X
IP66

US LISTED - File E10514 (Hazardous & Marine)
 US Certified - File LR11713

NR Restricted Breathing Option[Ⓢ]
Class I, Zone 2 AEx nAnR
Class I, Zone 2 Ex nR US

VM 50 - 150 WATT HIGH PRESSURE SODIUM PENDANT											
DESCRIPTION				5-1/2" OPTIC THREAD SIZE [Ⓢ]			7-3/4" OPTIC THREAD SIZE [Ⓢ]				
WATTS	ANSI	HUB SIZE [Ⓢ]	VOLTAGE [Ⓢ]	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD	
50	S68	3/4"	Quad	VM3S050A2GLG	VM3S050A2R1G	VM3S050A2R5G	VM4S050A2GLG	VM4S050A2R1G	VM4S050A2R5G	VM4S050A2ERN	
				VM3S070A2GLG	VM3S070A2R1G	VM3S070A2R5G	VM4S070A2GLG	VM4S070A2R1G	VM4S070A2R5G	VM4S070A2ERN	
70	S62	3/4"	Quad Tri 480	VM3S076A2GLG	VM3S076A2R1G	VM3S076A2R5G	VM4S076A2GLG	VM4S076A2R1G	VM4S076A2R5G	VM4S076A2ERN	
				VM3S075A2GLG	VM3S075A2R1G	VM3S075A2R5G	VM4S075A2GLG	VM4S075A2R1G	VM4S075A2R5G	VM4S075A2ERN	
				VM3S100A2GLG	VM3S100A2R1G	VM3S100A2R5G	VM4S100A2GLG	VM4S100A2R1G	VM4S100A2R5G	VM4S100A2ERN	
100	S54	3/4"	Quad Tri 480	VM3S106A2GLG	VM3S106A2R1G	VM3S106A2R5G	VM4S106A2GLG	VM4S106A2R1G	VM4S106A2R5G	VM4S106A2ERN	
				VM3S105A2GLG	VM3S105A2R1G	VM3S105A2R5G	VM4S105A2GLG	VM4S105A2R1G	VM4S105A2R5G	VM4S105A2ERN	
				VM3S150A2GLG	VM3S150A2R1G	VM3S150A2R5G	VM4S150A2GLG	VM4S150A2R1G	VM4S150A2R5G	VM4S150A2ERN	
150	S55	3/4"	Quad Tri 480	VM3S156A2GLG	VM3S156A2R1G	VM3S156A2R5G	VM4S156A2GLG	VM4S156A2R1G	VM4S156A2R5G	VM4S156A2ERN	
				VM3S155A2GLG	VM3S155A2R1G	VM3S155A2R5G	VM4S155A2GLG	VM4S155A2R1G	VM4S155A2R5G	VM4S155A2ERN	

VM 50 - 150 WATT HIGH PRESSURE SODIUM FLEXIBLE PENDANT											
DESCRIPTION				5-1/2" OPTIC THREAD SIZE [Ⓢ]			7-3/4" OPTIC THREAD SIZE [Ⓢ]				
WATTS	ANSI	HUB SIZE [Ⓢ]	VOLTAGE [Ⓢ]	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD	
50	S68	3/4"	Quad	VM3S050F2GLG	VM3S050F2R1G	VM3S050F2R5G	VM4S050F2GLG	VM4S050F2R1G	VM4S050F2R5G	VM4S050F2ERN	
				VM3S070F2GLG	VM3S070F2R1G	VM3S070F2R5G	VM4S070F2GLG	VM4S070F2R1G	VM4S070F2R5G	VM4S070F2ERN	
70	S62	3/4"	Quad Tri 480	VM3S076F2GLG	VM3S076F2R1G	VM3S076F2R5G	VM4S076F2GLG	VM4S076F2R1G	VM4S076F2R5G	VM4S076F2ERN	
				VM3S075F2GLG	VM3S075F2R1G	VM3S075F2R5G	VM4S075F2GLG	VM4S075F2R1G	VM4S075F2R5G	VM4S075F2ERN	
				VM3S100F2GLG	VM3S100F2R1G	VM3S100F2R5G	VM4S100F2GLG	VM4S100F2R1G	VM4S100F2R5G	VM4S100F2ERN	
100	S54	3/4"	Quad Tri 480	VM3S106F2GLG	VM3S106F2R1G	VM3S106F2R5G	VM4S106F2GLG	VM4S106F2R1G	VM4S106F2R5G	VM4S106F2ERN	
				VM3S105F2GLG	VM3S105F2R1G	VM3S105F2R5G	VM4S105F2GLG	VM4S105F2R1G	VM4S105F2R5G	VM4S105F2ERN	
				VM3S150F2GLG	VM3S150F2R1G	VM3S150F2R5G	VM4S150F2GLG	VM4S150F2R1G	VM4S150F2R5G	VM4S150F2ERN	
150	S55	3/4"	Quad Tri 480	VM3S156F2GLG	VM3S156F2R1G	VM3S156F2R5G	VM4S156F2GLG	VM4S156F2R1G	VM4S156F2R5G	VM4S156F2ERN	
				VM3S155F2GLG	VM3S155F2R1G	VM3S155F2R5G	VM4S155F2GLG	VM4S155F2R1G	VM4S155F2R5G	VM4S155F2ERN	

Ⓢ See hazardous application data on pages L131 - L140 for limitations.
 Ⓢ Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3S050A2GLN
 Ⓢ Catalog numbers shown are with 3/4" conduit openings; change 2 to 3 for 1"; e.g. VM3S050A3GLG.
 Ⓢ Consult catalog logic for other available voltages.
 Ⓢ Add suffix NR for restricted breathing; see page L84 for more information.

LIGHTING

CERTILITE® V SERIES



HIGH PRESSURE SODIUM, 50-150W MOGUL BASE HID



Ceiling
w/ 5-1/2"
Globe & Guard



Wall
w/ 5-1/2"
Refractor & Guard



Ceiling
w/ 7-3/4"
Globe & Guard



Wall
w/ 7-3/4"
Refractor & Guard



Ceiling
w/ Enclosed Reflector

VM 50 - 150 WATT HIGH PRESSURE SODIUM CEILING										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD
50	S68	3/4"	Quad	VM3S050X2GLG	VM3S050X2R1G	VM3S050X2R5G	VM4S050X2GLG	VM4S050X2R1G	VM4S050X2R5G	VM4S050X2ERN
				VM3S070X2GLG	VM3S070X2R1G	VM3S070X2R5G	VM4S070X2GLG	VM4S070X2R1G	VM4S070X2R5G	VM4S070X2ERN
70	S62	3/4"	Quad Tri 480	VM3S076X2GLG	VM3S076X2R1G	VM3S076X2R5G	VM4S076X2GLG	VM4S076X2R1G	VM4S076X2R5G	VM4S076X2ERN
				VM3S075X2GLG	VM3S075X2R1G	VM3S075X2R5G	VM4S075X2GLG	VM4S075X2R1G	VM4S075X2R5G	VM4S075X2ERN
				VM3S100X2GLG	VM3S100X2R1G	VM3S100X2R5G	VM4S100X2GLG	VM4S100X2R1G	VM4S100X2R5G	VM4S100X2ERN
100	S54	3/4"	Quad Tri 480	VM3S106X2GLG	VM3S106X2R1G	VM3S106X2R5G	VM4S106X2GLG	VM4S106X2R1G	VM4S106X2R5G	VM4S106X2ERN
				VM3S105X2GLG	VM3S105X2R1G	VM3S105X2R5G	VM4S105X2GLG	VM4S105X2R1G	VM4S105X2R5G	VM4S105X2ERN
				VM3S150X2GLG	VM3S150X2R1G	VM3S150X2R5G	VM4S150X2GLG	VM4S150X2R1G	VM4S150X2R5G	VM4S150X2ERN
150	S55	3/4"	Quad Tri 480	VM3S156X2GLG	VM3S156X2R1G	VM3S156X2R5G	VM4S156X2GLG	VM4S156X2R1G	VM4S156X2R5G	VM4S156X2ERN
				VM3S155X2GLG	VM3S155X2R1G	VM3S155X2R5G	VM4S155X2GLG	VM4S155X2R1G	VM4S155X2R5G	VM4S155X2ERN

VM 50 - 150 WATT HIGH PRESSURE SODIUM FLEXIBLE PENDANT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD
50	S68	3/4"	Quad	VM3S050F2GLG	VM3S050F2R1G	VM3S050F2R5G	VM4S050F2GLG	VM4S050F2R1G	VM4S050F2R5G	VM4S050F2ERN
				VM3S070F2GLG	VM3S070F2R1G	VM3S070F2R5G	VM4S070F2GLG	VM4S070F2R1G	VM4S070F2R5G	VM4S070F2ERN
70	S62	3/4"	Quad Tri 480	VM3S076F2GLG	VM3S076F2R1G	VM3S076F2R5G	VM4S076F2GLG	VM4S076F2R1G	VM4S076F2R5G	VM4S076F2ERN
				VM3S075F2GLG	VM3S075F2R1G	VM3S075F2R5G	VM4S075F2GLG	VM4S075F2R1G	VM4S075F2R5G	VM4S075F2ERN
				VM3S100F2GLG	VM3S100F2R1G	VM3S100F2R5G	VM4S100F2GLG	VM4S100F2R1G	VM4S100F2R5G	VM4S100F2ERN
100	S54	3/4"	Quad Tri 480	VM3S106F2GLG	VM3S106F2R1G	VM3S106F2R5G	VM4S106F2GLG	VM4S106F2R1G	VM4S106F2R5G	VM4S106F2ERN
				VM3S105F2GLG	VM3S105F2R1G	VM3S105F2R5G	VM4S105F2GLG	VM4S105F2R1G	VM4S105F2R5G	VM4S105F2ERN
				VM3S150F2GLG	VM3S150F2R1G	VM3S150F2R5G	VM4S150F2GLG	VM4S150F2R1G	VM4S150F2R5G	VM4S150F2ERN
150	S55	3/4"	Quad Tri 480	VM3S156F2GLG	VM3S156F2R1G	VM3S156F2R5G	VM4S156F2GLG	VM4S156F2R1G	VM4S156F2R5G	VM4S156F2ERN
				VM3S155F2GLG	VM3S155F2R1G	VM3S155F2R5G	VM4S155F2GLG	VM4S155F2R1G	VM4S155F2R5G	VM4S155F2ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3S050A2GLN

③ Catalog numbers shown are with 3/4" conduit openings; change 2 to 3 for 1"; e.g. VM3S050A3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.



HIGH PRESSURE SODIUM, 50-150W MOGUL BASE HID



VM 50 - 150 WATT HIGH PRESSURE SODIUM CONE										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD
50	S68	3/4"	Quad	VM3S050C2GLG	VM3S050C2R1G	VM3S050C2R5G	VM4S050C2GLG	VM4S050C2R1G	VM4S050C2R5G	VM4S050C2ERN
				VM3S070C2GLG	VM3S070C2R1G	VM3S070C2R5G	VM4S070C2GLG	VM4S070C2R1G	VM4S070C2R5G	VM4S070C2ERN
70	S62	3/4"	Quad Tri 480	VM3S076C2GLG	VM3S076C2R1G	VM3S076C2R5G	VM4S076C2GLG	VM4S076C2R1G	VM4S076C2R5G	VM4S076C2ERN
				VM3S075C2GLG	VM3S075C2R1G	VM3S075C2R5G	VM4S075C2GLG	VM4S075C2R1G	VM4S075C2R5G	VM4S075C2ERN
				VM3S100C2GLG	VM3S100C2R1G	VM3S100C2R5G	VM4S100C2GLG	VM4S100C2R1G	VM4S100C2R5G	VM4S100C2ERN
100	S54	3/4"	Quad Tri 480	VM3S106C2GLG	VM3S106C2R1G	VM3S106C2R5G	VM4S106C2GLG	VM4S106C2R1G	VM4S106C2R5G	VM4S106C2ERN
				VM3S105C2GLG	VM3S105C2R1G	VM3S105C2R5G	VM4S105C2GLG	VM4S105C2R1G	VM4S105C2R5G	VM4S105C2ERN
				VM3S150C2GLG	VM3S150C2R1G	VM3S150C2R5G	VM4S150C2GLG	VM4S150C2R1G	VM4S150C2R5G	VM4S150C2ERN
150	S55	3/4"	Quad Tri 480	VM3S156C2GLG	VM3S156C2R1G	VM3S156C2R5G	VM4S156C2GLG	VM4S156C2R1G	VM4S156C2R5G	VM4S156C2ERN
				VM3S155C2GLG	VM3S155C2R1G	VM3S155C2R5G	VM4S155C2GLG	VM4S155C2R1G	VM4S155C2R5G	VM4S155C2ERN

VM 50 - 150 WATT HIGH PRESSURE SODIUM EZ ADAPTER ⑥										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	12" SPIN-TOP TYPE V REFRACTOR & GUARD
50	S68	⑥	Quad	VM3S050EZGLG	VM3S050EZR1G	VM3S050EZR5G	VM4S050EZGLG	VM4S050EZR1G	VM4S050EZR5G	VM4S050EZERN
				VM3S070EZGLG	VM3S070EZR1G	VM3S070EZR5G	VM4S070EZGLG	VM4S070EZR1G	VM4S070EZR5G	VM4S070EZERN
70	S62	⑥	Quad Tri 480	VM3S076EZGLG	VM3S076EZR1G	VM3S076EZR5G	VM4S076EZGLG	VM4S076EZR1G	VM4S076EZR5G	VM4S076EZERN
				VM3S075EZGLG	VM3S075EZR1G	VM3S075EZR5G	VM4S075EZGLG	VM4S075EZR1G	VM4S075EZR5G	VM4S075EZERN
				VM3S100EZGLG	VM3S100EZR1G	VM3S100EZR5G	VM4S100EZGLG	VM4S100EZR1G	VM4S100EZR5G	VM4S100EZERN
100	S54	⑥	Quad Tri 480	VM3S106EZGLG	VM3S106EZR1G	VM3S106EZR5G	VM4S106EZGLG	VM4S106EZR1G	VM4S106EZR5G	VM4S106EZERN
				VM3S105EZGLG	VM3S105EZR1G	VM3S105EZR5G	VM4S105EZGLG	VM4S105EZR1G	VM4S105EZR5G	VM4S105EZERN
				VM3S150EZGLG	VM3S150EZR1G	VM3S150EZR5G	VM4S150EZGLG	VM4S150EZR1G	VM4S150EZR5G	VM4S150EZERN
150	S55	⑥	Quad Tri 480	VM3S156EZGLG	VM3S156EZR1G	VM3S156EZR5G	VM4S156EZGLG	VM4S156EZR1G	VM4S156EZR5G	VM4S156EZERN
				VM3S155EZGLG	VM3S155EZR1G	VM3S155EZR5G	VM4S155EZGLG	VM4S155EZR1G	VM4S155EZR5G	VM4S155EZERN

① See hazardous application data on pages L131 - L140 for limitations.
 ② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3S050C2GLN
 ③ Cone top catalog numbers shown are with 3/4" conduit openings, change 2 to 3 for 1"; e.g. VM3S050C3GLG.
 ④ Consult catalog logic for other available voltages.
 ⑤ Add suffix NR for restricted breathing; see page L84 for more information.
 ⑥ VMEZA tank adapters UL "classified" as an assembly for use between VM tanks and EZ mounts. Order EZ mounts separately.

LIGHTING

CERTILITE® V SERIES



HIGH PRESSURE SODIUM, 50-150W MOGUL BASE HID



Stanchion 25°
w/ 5-1/2"
Globe & Guard



Stanchion Straight
w/ 5-1/2"
Refractor & Guard



Stanchion 25°
w/ 7-3/4"
Globe & Guard



Stanchion Straight
w/ 7-3/4"
Refractor & Guard



Stanchion 25°
w/ Enclosed Reflector

VM 50 - 150 WATT HIGH PRESSURE SODIUM STANCHION 25° ANGLE										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
50	S68	1-1/2"	Quad	VM3S050D5GLG	VM3S050D5R1G	VM3S050D5R5G	VM4S050D5GLG	VM4S050D5R1G	VM4S050D5R5G	VM4S050D5ERN
70	S62	1-1/2"	Quad Tri 480	VM3S070D5GLG	VM3S070D5R1G	VM3S070D5R5G	VM4S070D5GLG	VM4S070D5R1G	VM4S070D5R5G	VM4S070D5ERN
				VM3S076D5GLG	VM3S076D5R1G	VM3S076D5R5G	VM4S076D5GLG	VM4S076D5R1G	VM4S076D5R5G	VM4S076D5ERN
				VM3S075D5GLG	VM3S075D5R1G	VM3S075D5R5G	VM4S075D5GLG	VM4S075D5R1G	VM4S075D5R5G	VM4S075D5ERN
100	S54	1-1/2"	Quad Tri 480	VM3S100D5GLG	VM3S100D5R1G	VM3S100D5R5G	VM4S100D5GLG	VM4S100D5R1G	VM4S100D5R5G	VM4S100D5ERN
				VM3S106D5GLG	VM3S106D5R1G	VM3S106D5R5G	VM4S106D5GLG	VM4S106D5R1G	VM4S106D5R5G	VM4S106D5ERN
				VM3S105D5GLG	VM3S105D5R1G	VM3S105D5R5G	VM4S105D5GLG	VM4S105D5R1G	VM4S105D5R5G	VM4S105D5ERN
150	S55	1-1/2"	Quad Tri 480	VM3S150D5GLG	VM3S150D5R1G	VM3S150D5R5G	VM4S150D5GLG	VM4S150D5R1G	VM4S150D5R5G	VM4S150D5ERN
				VM3S156D5GLG	VM3S156D5R1G	VM3S156D5R5G	VM4S156D5GLG	VM4S156D5R1G	VM4S156D5R5G	VM4S156D5ERN
				VM3S155D5GLG	VM3S155D5R1G	VM3S155D5R5G	VM4S155D5GLG	VM4S155D5R1G	VM4S155D5R5G	VM4S155D5ERN

VM 50 - 150 WATT HIGH PRESSURE SODIUM STANCHION STRAIGHT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
50	S68	1-1/2"	Quad	VM3S050S5GLG	VM3S050S5R1G	VM3S050S5R5G	VM4S050S5GLG	VM4S050S5R1G	VM4S050S5R5G	VM4S050S5ERN
70	S62	1-1/2"	Quad Tri 480	VM3S070S5GLG	VM3S070S5R1G	VM3S070S5R5G	VM4S070S5GLG	VM4S070S5R1G	VM4S070S5R5G	VM4S070S5ERN
				VM3S076S5GLG	VM3S076S5R1G	VM3S076S5R5G	VM4S076S5GLG	VM4S076S5R1G	VM4S076S5R5G	VM4S076S5ERN
				VM3S075S5GLG	VM3S075S5R1G	VM3S075S5R5G	VM4S075S5GLG	VM4S075S5R1G	VM4S075S5R5G	VM4S075S5ERN
100	S54	1-1/2"	Quad Tri 480	VM3S100S5GLG	VM3S100S5R1G	VM3S100S5R5G	VM4S100S5GLG	VM4S100S5R1G	VM4S100S5R5G	VM4S100S5ERN
				VM3S106S5GLG	VM3S106S5R1G	VM3S106S5R5G	VM4S106S5GLG	VM4S106S5R1G	VM4S106S5R5G	VM4S106S5ERN
				VM3S105S5GLG	VM3S105S5R1G	VM3S105S5R5G	VM4S105S5GLG	VM4S105S5R1G	VM4S105S5R5G	VM4S105S5ERN
150	S55	1-1/2"	Quad Tri 480	VM3S150S5GLG	VM3S150S5R1G	VM3S150S5R5G	VM4S150S5GLG	VM4S150S5R1G	VM4S150S5R5G	VM4S150S5ERN
				VM3S156S5GLG	VM3S156S5R1G	VM3S156S5R5G	VM4S156S5GLG	VM4S156S5R1G	VM4S156S5R5G	VM4S156S5ERN
				VM3S155S5GLG	VM3S155S5R1G	VM3S155S5R5G	VM4S155S5GLG	VM4S155S5R1G	VM4S155S5R5G	VM4S155S5ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3S050D5GLN

③ Catalog numbers shown are with 1-1/2" conduit openings, change 5 to 4 for 1-1/4"; e.g. VM3S050D4GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.



METAL HALIDE, 70-250W MOGUL BASE HID



Pendant
w/ 5-1/2"
Globe & Guard



Flexible Pendant
w/ 5-1/2"
Refractor & Guard



Pendant
w/ 7-3/4"
Globe & Guard



Flexible Pendant
w/ 7-3/4"
Refractor & Guard



Pendant
w/ Enclosed Reflector

Class I, Div. 2, Groups A,B,C,D^①
Class I, Zone 2, Groups IIC, IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III
Suitable for wet locations
NEMA 3, 4, 4X
IP66

US LISTED - File E10514 (Hazardous & Marine)

US Certified - File LR11713

NR Restricted Breathing Option^⑤

Class I, Zone 2 AEx nAnR
Class I, Zone 2 Ex nR

VM 70 - 250 WATT METAL HALIDE PENDANT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ^②			7-3/4" OPTIC THREAD SIZE ^②			
WATTS	ANSI	HUB SIZE ^③	VOLTAGE ^④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	3/4"	Quad Tri 480	VM3H070A2GLG	VM3H070A2R1G	VM3H070A2R5G	VM4H070A2GLG	VM4H070A2R1G	VM4H070A2R5G	VM4H070A2ERN
				VM3H076A2GLG	VM3H076A2R1G	VM3H076A2R5G	VM4H076A2GLG	VM4H076A2R1G	VM4H076A2R5G	VM4H076A2ERN
				VM3H075A2GLG	VM3H075A2R1G	VM3H075A2R5G	VM4H075A2GLG	VM4H075A2R1G	VM4H075A2R5G	VM4H075A2ERN
100	M90 M140	3/4"	Quad Tri 480	VM3H100A2GLG	VM3H100A2R1G	VM3H100A2R5G	VM4H100A2GLG	VM4H100A2R1G	VM4H100A2R5G	VM4H100A2ERN
				VM3H106A2GLG	VM3H106A2R1G	VM3H106A2R5G	VM4H106A2GLG	VM4H106A2R1G	VM4H106A2R5G	VM4H106A2ERN
				VM3H105A2GLG	VM3H105A2R1G	VM3H105A2R5G	VM4H105A2GLG	VM4H105A2R1G	VM4H105A2R5G	VM4H105A2ERN
175 ^⑥	M57	3/4"	Quad Tri 480	VM3H170A2GLG	VM3H170A2R1G	VM3H170A2R5G	VM4H170A2GLG	VM4H170A2R1G	VM4H170A2R5G	VM4H170A2ERN
				VM3H176A2GLG	VM3H176A2R1G	VM3H176A2R5G	VM4H176A2GLG	VM4H176A2R1G	VM4H176A2R5G	VM4H176A2ERN
				VM3H175A2GLG	VM3H175A2R1G	VM3H175A2R5G	VM4H175A2GLG	VM4H175A2R1G	VM4H175A2R5G	VM4H175A2ERN
250 ^⑥	M58	3/4"	Quad Tri 480	VM3H250A2GLG	VM3H250A2R1G	VM3H250A2R5G	VM4H250A2GLG	VM4H250A2R1G	VM4H250A2R5G	VM4H250A2ERN
				VM3H256A2GLG	VM3H256A2R1G	VM3H256A2R5G	VM4H256A2GLG	VM4H256A2R1G	VM4H256A2R5G	VM4H256A2ERN
				VM3H255A2GLG	VM3H255A2R1G	VM3H255A2R5G	VM4H255A2GLG	VM4H255A2R1G	VM4H255A2R5G	VM4H255A2ERN

VM 70 - 250 WATT METAL HALIDE FLEXIBLE PENDANT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ^②			7-3/4" OPTIC THREAD SIZE ^②			
WATTS	ANSI	HUB SIZE ^③	VOLTAGE ^④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	3/4"	Quad Tri 480	VM3H070F2GLG	VM3H070F2R1G	VM3H070F2R5G	VM4H070F2GLG	VM4H070F2R1G	VM4H070F2R5G	VM4H070F2ERN
				VM3H076F2GLG	VM3H076F2R1G	VM3H076F2R5G	VM4H076F2GLG	VM4H076F2R1G	VM4H076F2R5G	VM4H076F2ERN
				VM3H075F2GLG	VM3H075F2R1G	VM3H075F2R5G	VM4H075F2GLG	VM4H075F2R1G	VM4H075F2R5G	VM4H075F2ERN
100	M90 M140	3/4"	Quad Tri 480	VM3H100F2GLG	VM3H100F2R1G	VM3H100F2R5G	VM4H100F2GLG	VM4H100F2R1G	VM4H100F2R5G	VM4H100F2ERN
				VM3H106F2GLG	VM3H106F2R1G	VM3H106F2R5G	VM4H106F2GLG	VM4H106F2R1G	VM4H106F2R5G	VM4H106F2ERN
				VM3H105F2GLG	VM3H105F2R1G	VM3H105F2R5G	VM4H105F2GLG	VM4H105F2R1G	VM4H105F2R5G	VM4H105F2ERN
175 ^⑥	M57	3/4"	Quad Tri 480	VM3H170F2GLG	VM3H170F2R1G	VM3H170F2R5G	VM4H170F2GLG	VM4H170F2R1G	VM4H170F2R5G	VM4H170F2ERN
				VM3H176F2GLG	VM3H176F2R1G	VM3H176F2R5G	VM4H176F2GLG	VM4H176F2R1G	VM4H176F2R5G	VM4H176F2ERN
				VM3H175F2GLG	VM3H175F2R1G	VM3H175F2R5G	VM4H175F2GLG	VM4H175F2R1G	VM4H175F2R5G	VM4H175F2ERN
250 ^⑥	M58	3/4"	Quad Tri 480	VM3H250F2GLG	VM3H250F2R1G	VM3H250F2R5G	VM4H250F2GLG	VM4H250F2R1G	VM4H250F2R5G	VM4H250F2ERN
				VM3H256F2GLG	VM3H256F2R1G	VM3H256F2R5G	VM4H256F2GLG	VM4H256F2R1G	VM4H256F2R5G	VM4H256F2ERN
				VM3H255F2GLG	VM3H255F2R1G	VM3H255F2R5G	VM4H255F2GLG	VM4H255F2R1G	VM4H255F2R5G	VM4H255F2ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3H070A2GLN

③ Catalog numbers shown are with 3/4" conduit openings, change 2 to 3 for 1"; e.g. VM3H070A3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.

⑥ 175W M57 & 250W M58 Fixtures are EXPORT ONLY (EISA LAW).

LIGHTING

CERTILITE® V SERIES



METAL HALIDE, 70-250W MOGUL BASE HID



Ceiling
w/ 5-1/2"
Globe & Guard



Wall
w/ 5-1/2"
Refractor & Guard



Ceiling
w/ Enclosed Reflector



Ceiling
w/ 7-3/4"
Globe & Guard



Wall
w/ 7-3/4"
Refractor & Guard

VM 70 - 250 WATT METAL HALIDE CEILING											
DESCRIPTION				5-1/2 OPTIC THREAD SIZE ②			7-3/4 OPTIC THREAD SIZE ②				
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR	
70	M98	3/4"	Quad Tri 480	VM3H070X2GLG	VM3H070X2R1G	VM3H070X2R5G	VM4H070X2GLG	VM4H070X2R1G	VM4H070X2R5G	VM4H070X2ERN	
	M143			VM3H076X2GLG	VM3H076X2R1G	VM3H076X2R5G	VM4H076X2GLG	VM4H076X2R1G	VM4H076X2R5G	VM4H076X2ERN	
				VM3H075X2GLG	VM3H075X2R1G	VM3H075X2R5G	VM4H075X2GLG	VM4H075X2R1G	VM4H075X2R5G	VM4H075X2ERN	
100	M90	3/4"	Quad Tri 480	VM3H100X2GLG	VM3H100X2R1G	VM3H100X2R5G	VM4H100X2GLG	VM4H100X2R1G	VM4H100X2R5G	VM4H100X2ERN	
	M140			VM3H106X2GLG	VM3H106X2R1G	VM3H106X2R5G	VM4H106X2GLG	VM4H106X2R1G	VM4H106X2R5G	VM4H106X2ERN	
				VM3H105X2GLG	VM3H105X2R1G	VM3H105X2R5G	VM4H105X2GLG	VM4H105X2R1G	VM4H105X2R5G	VM4H105X2ERN	
175 ⑤	M57	3/4"	Quad Tri 480	VM3H170X2GLG	VM3H170X2R1G	VM3H170X2R5G	VM4H170X2GLG	VM4H170X2R1G	VM4H170X2R5G	VM4H170X2ERN	
					VM3H176X2GLG	VM3H176X2R1G	VM3H176X2R5G	VM4H176X2GLG	VM4H176X2R1G	VM4H176X2R5G	VM4H176X2ERN
					VM3H175X2GLG	VM3H175X2R1G	VM3H175X2R5G	VM4H175X2GLG	VM4H175X2R1G	VM4H175X2R5G	VM4H175X2ERN
250 ⑤	M58	3/4"	Quad Tri 480	VM3H250X2GLG	VM3H250X2R1G	VM3H250X2R5G	VM4H250X2GLG	VM4H250X2R1G	VM4H250X2R5G	VM4H250X2ERN	
					VM3H256X2GLG	VM3H256X2R1G	VM3H256X2R5G	VM4H256X2GLG	VM4H256X2R1G	VM4H256X2R5G	VM4H256X2ERN
					VM3H255X2GLG	VM3H255X2R1G	VM3H255X2R5G	VM4H255X2GLG	VM4H255X2R1G	VM4H255X2R5G	VM4H255X2ERN

VM 70 - 250 WATT METAL HALIDE WALL											
DESCRIPTION				5-1/2 OPTIC THREAD SIZE ②			7-3/4 OPTIC THREAD SIZE ②				
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR	
70	M98	3/4"	Quad Tri 480	VM3H070B2GLG	VM3H070B2R1G	VM3H070B2R5G	VM4H070B2GLG	VM4H070B2R1G	VM4H070B2R5G	VM4H070B2ERN	
	M143			VM3H076B2GLG	VM3H076B2R1G	VM3H076B2R5G	VM4H076B2GLG	VM4H076B2R1G	VM4H076B2R5G	VM4H076B2ERN	
				VM3H075B2GLG	VM3H075B2R1G	VM3H075B2R5G	VM4H075B2GLG	VM4H075B2R1G	VM4H075B2R5G	VM4H075B2ERN	
100	M90	3/4"	Quad Tri 480	VM3H100B2GLG	VM3H100B2R1G	VM3H100B2R5G	VM4H100B2GLG	VM4H100B2R1G	VM4H100B2R5G	VM4H100B2ERN	
	M140			VM3H106B2GLG	VM3H106B2R1G	VM3H106B2R5G	VM4H106B2GLG	VM4H106B2R1G	VM4H106B2R5G	VM4H106B2ERN	
				VM3H105B2GLG	VM3H105B2R1G	VM3H105B2R5G	VM4H105B2GLG	VM4H105B2R1G	VM4H105B2R5G	VM4H105B2ERN	
175 ⑤	M57	3/4"	Quad Tri 480	VM3H170B2GLG	VM3H170B2R1G	VM3H170B2R5G	VM4H170B2GLG	VM4H170B2R1G	VM4H170B2R5G	VM4H170B2ERN	
					VM3H176B2GLG	VM3H176B2R1G	VM3H176B2R5G	VM4H176B2GLG	VM4H176B2R1G	VM4H176B2R5G	VM4H176B2ERN
					VM3H175B2GLG	VM3H175B2R1G	VM3H175B2R5G	VM4H175B2GLG	VM4H175B2R1G	VM4H175B2R5G	VM4H175B2ERN
250 ⑤	M58	3/4"	Quad Tri 480	VM3H250B2GLG	VM3H250B2R1G	VM3H250B2R5G	VM4H250B2GLG	VM4H250B2R1G	VM4H250B2R5G	VM4H250B2ERN	
					VM3H256B2GLG	VM3H256B2R1G	VM3H256B2R5G	VM4H256B2GLG	VM4H256B2R1G	VM4H256B2R5G	VM4H256B2ERN
					VM3H255B2GLG	VM3H255B2R1G	VM3H255B2R5G	VM4H255B2GLG	VM4H255B2R1G	VM4H255B2R5G	VM4H255B2ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3H070X2GLN

③ Catalog numbers shown are with 3/4" conduit openings, change 2 to 3 for 1"; e.g. VM3H070X3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.

⑥ 175W M57 & 250W M58 Fixtures are EXPORT ONLY (EISA LAW).



METAL HALIDE, 70-250W MOGUL BASE HID



VM 70 - 250 WATT METAL HALIDE CONE										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	3/4"	Quad Tri 480	VM3H070C2GLG	VM3H070C2R1G	VM3H070C2R5G	VM4H070C2GLG	VM4H070C2R1G	VM4H070C2R5G	VM4H070C2ERN
				VM3H076C2GLG	VM3H076C2R1G	VM3H076C2R5G	VM4H076C2GLG	VM4H076C2R1G	VM4H076C2R5G	VM4H076C2ERN
				VM3H075C2GLG	VM3H075C2R1G	VM3H075C2R5G	VM4H075C2GLG	VM4H075C2R1G	VM4H075C2R5G	VM4H075C2ERN
100	M90 M140	3/4"	Quad Tri 480	VM3H100C2GLG	VM3H100C2R1G	VM3H100C2R5G	VM4H100C2GLG	VM4H100C2R1G	VM4H100C2R5G	VM4H100C2ERN
				VM3H106C2GLG	VM3H106C2R1G	VM3H106C2R5G	VM4H106C2GLG	VM4H106C2R1G	VM4H106C2R5G	VM4H106C2ERN
				VM3H105C2GLG	VM3H105C2R1G	VM3H105C2R5G	VM4H105C2GLG	VM4H105C2R1G	VM4H105C2R5G	VM4H105C2ERN
175 ⑥	M57	3/4"	Quad Tri 480	VM3H170C2GLG	VM3H170C2R1G	VM3H170C2R5G	VM4H170C2GLG	VM4H170C2R1G	VM4H170C2R5G	VM4H170C2ERN
				VM3H176C2GLG	VM3H176C2R1G	VM3H176C2R5G	VM4H176C2GLG	VM4H176C2R1G	VM4H176C2R5G	VM4H176C2ERN
				VM3H175C2GLG	VM3H175C2R1G	VM3H175C2R5G	VM4H175C2GLG	VM4H175C2R1G	VM4H175C2R5G	VM4H175C2ERN
250 ⑥	M58	3/4"	Quad Tri 480	VM3H250C2GLG	VM3H250C2R1G	VM3H250C2R5G	VM4H250C2GLG	VM4H250C2R1G	VM4H250C2R5G	VM4H250C2ERN
				VM3H256C2GLG	VM3H256C2R1G	VM3H256C2R5G	VM4H256C2GLG	VM4H256C2R1G	VM4H256C2R5G	VM4H256C2ERN
				VM3H255C2GLG	VM3H255C2R1G	VM3H255C2R5G	VM4H255C2GLG	VM4H255C2R1G	VM4H255C2R5G	VM4H255C2ERN

VM 70 - 250 WATT METAL HALIDE EZ ADAPTER										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	3/4"	Quad Tri 480	VM3H070EZGLG	VM3H070EZR1G	VM3H070EZR5G	VM4H070EZGLG	VM4H070EZR1G	VM4H070EZR5G	VM4H070EZERN
				VM3H076EZGLG	VM3H076EZR1G	VM3H076EZR5G	VM4H076EZGLG	VM4H076EZR1G	VM4H076EZR5G	VM4H076EZERN
				VM3H075EZGLG	VM3H075EZR1G	VM3H075EZR5G	VM4H075EZGLG	VM4H075EZR1G	VM4H075EZR5G	VM4H075EZERN
100	M90 M140	3/4"	Quad Tri 480	VM3H100EZGLG	VM3H100EZR1G	VM3H100EZR5G	VM4H100EZGLG	VM4H100EZR1G	VM4H100EZR5G	VM4H100EZERN
				VM3H106EZGLG	VM3H106EZR1G	VM3H106EZR5G	VM4H106EZGLG	VM4H106EZR1G	VM4H106EZR5G	VM4H106EZERN
				VM3H105EZGLG	VM3H105EZR1G	VM3H105EZR5G	VM4H105EZGLG	VM4H105EZR1G	VM4H105EZR5G	VM4H105EZERN
175 ⑥	M57	3/4"	Quad Tri 480	VM3H170EZGLG	VM3H170EZR1G	VM3H170EZR5G	VM4H170EZGLG	VM4H170EZR1G	VM4H170EZR5G	VM4H170EZERN
				VM3H176EZGLG	VM3H176EZR1G	VM3H176EZR5G	VM4H176EZGLG	VM4H176EZR1G	VM4H176EZR5G	VM4H176EZERN
				VM3H175EZGLG	VM3H175EZR1G	VM3H175EZR5G	VM4H175EZGLG	VM4H175EZR1G	VM4H175EZR5G	VM4H175EZERN
250 ⑥	M58	3/4"	Quad Tri 480	VM3H250EZGLG	VM3H250EZR1G	VM3H250EZR5G	VM4H250EZGLG	VM4H250EZR1G	VM4H250EZR5G	VM4H250EZERN
				VM3H256EZGLG	VM3H256EZR1G	VM3H256EZR5G	VM4H256EZGLG	VM4H256EZR1G	VM4H256EZR5G	VM4H256EZERN
				VM3H255EZGLG	VM3H255EZR1G	VM3H255EZR5G	VM4H255EZGLG	VM4H255EZR1G	VM4H255EZR5G	VM4H255EZERN

① See hazardous application data on pages L131 - L140 for limitations.
 ② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3H070A2GLN
 ③ Catalog numbers shown are with 3/4" conduit openings, change 2 to 3 for 1"; e.g. VM3H070A3GLG.
 ④ Consult catalog logic for other available voltages.
 ⑤ Add suffix NR for restricted breathing; see page L84 for more information.
 ⑥ 175W M57 & 250W M58 Fixtures are EXPORT ONLY (EISA LAW).
 ⑦ VMEZA tank adapters UL "classified" as an assembly for use between VM tanks and EZ mounts. Order EZ mounts separately.

LIGHTING

CERTILITE® V SERIES



METAL HALIDE, 70-250W MOGUL BASE HID



Stanchion 25°
w/ 5-1/2"
Globe & Guard



Stanchion Straight
w/ 5-1/2"
Refractor & Guard



Stanchion 25°
w/ 7-3/4"
Globe & Guard



Stanchion Straight
w/ 7-3/4"
Refractor & Guard



Stanchion 25°
w/ Enclosed Reflector

VM 70 - 250 WATT METAL HALIDE STANCHION 25° ANGLE

DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	1-1/2"	Quad Tri 480	VM3H070D5GLG	VM3H070D5R1G	VM3H070D5R5G	VM4H070D5GLG	VM4H070D5R1G	VM4H070D5R5G	VM4H070D5ERN
				VM3H076D5GLG	VM3H076D5R1G	VM3H076D5R5G	VM4H076D5GLG	VM4H076D5R1G	VM4H076D5R5G	VM4H076D5ERN
				VM3H075D5GLG	VM3H075D5R1G	VM3H075D5R5G	VM4H075D5GLG	VM4H075D5R1G	VM4H075D5R5G	VM4H075D5ERN
100	M90 M140	1-1/2"	Quad Tri 480	VM3H100D5GLG	VM3H100D5R1G	VM3H100D5R5G	VM4H100D5GLG	VM4H100D5R1G	VM4H100D5R5G	VM4H100D5ERN
				VM3H106D5GLG	VM3H106D5R1G	VM3H106D5R5G	VM4H106D5GLG	VM4H106D5R1G	VM4H106D5R5G	VM4H106D5ERN
				VM3H105D5GLG	VM3H105D5R1G	VM3H105D5R5G	VM4H105D5GLG	VM4H105D5R1G	VM4H105D5R5G	VM4H105D5ERN
175 ⑤	M57	1-1/2"	Quad Tri 480	VM3H170D5GLG	VM3H170D5R1G	VM3H170D5R5G	VM4H170D5GLG	VM4H170D5R1G	VM4H170D5R5G	VM4H170D5ERN
				VM3H176D5GLG	VM3H176D5R1G	VM3H176D5R5G	VM4H176D5GLG	VM4H176D5R1G	VM4H176D5R5G	VM4H176D5ERN
				VM3H175D5GLG	VM3H175D5R1G	VM3H175D5R5G	VM4H175D5GLG	VM4H175D5R1G	VM4H175D5R5G	VM4H175D5ERN
250 ⑥	M58	1-1/2"	Quad Tri 480	VM3H250D5GLG	VM3H250D5R1G	VM3H250D5R5G	VM4H250D5GLG	VM4H250D5R1G	VM4H250D5R5G	VM4H250D5ERN
				VM3H256D5GLG	VM3H256D5R1G	VM3H256D5R5G	VM4H256D5GLG	VM4H256D5R1G	VM4H256D5R5G	VM4H256D5ERN
				VM3H255D5GLG	VM3H255D5R1G	VM3H255D5R5G	VM4H255D5GLG	VM4H255D5R1G	VM4H255D5R5G	VM4H255D5ERN

VM 70 - 250 WATT METAL HALIDE STANCHION STRAIGHT

DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
70	M98 M143	1-1/2"	Quad Tri 480	VM3H070S5GLG	VM3H070S5R1G	VM3H070S5R5G	VM4H070S5GLG	VM4H070S5R1G	VM4H070S5R5G	VM4H070S5ERN
				VM3H076S5GLG	VM3H076S5R1G	VM3H076S5R5G	VM4H076S5GLG	VM4H076S5R1G	VM4H076S5R5G	VM4H076S5ERN
				VM3H075S5GLG	VM3H075S5R1G	VM3H075S5R5G	VM4H075S5GLG	VM4H075S5R1G	VM4H075S5R5G	VM4H075S5ERN
100	M90 M140	1-1/2"	Quad Tri 480	VM3H100S5GLG	VM3H100S5R1G	VM3H100S5R5G	VM4H100S5GLG	VM4H100S5R1G	VM4H100S5R5G	VM4H100S5ERN
				VM3H106S5GLG	VM3H106S5R1G	VM3H106S5R5G	VM4H106S5GLG	VM4H106S5R1G	VM4H106S5R5G	VM4H106S5ERN
				VM3H105S5GLG	VM3H105S5R1G	VM3H105S5R5G	VM4H105S5GLG	VM4H105S5R1G	VM4H105S5R5G	VM4H105S5ERN
175 ⑤	M57	1-1/2"	Quad Tri 480	VM3H170S5GLG	VM3H170S5R1G	VM3H170S5R5G	VM4H170S5GLG	VM4H170S5R1G	VM4H170S5R5G	VM4H170S5ERN
				VM3H176S5GLG	VM3H176S5R1G	VM3H176S5R5G	VM4H176S5GLG	VM4H176S5R1G	VM4H176S5R5G	VM4H176S5ERN
				VM3H175S5GLG	VM3H175S5R1G	VM3H175S5R5G	VM4H175S5GLG	VM4H175S5R1G	VM4H175S5R5G	VM4H175S5ERN
250 ⑥	M58	1-1/2"	Quad Tri 480	VM3H250S5GLG	VM3H250S5R1G	VM3H250S5R5G	VM4H250S5GLG	VM4H250S5R1G	VM4H250S5R5G	VM4H250S5ERN
				VM3H256S5GLG	VM3H256S5R1G	VM3H256S5R5G	VM4H256S5GLG	VM4H256S5R1G	VM4H256S5R5G	VM4H256S5ERN
				VM3H255S5GLG	VM3H255S5R1G	VM3H255S5R5G	VM4H255S5GLG	VM4H255S5R1G	VM4H255S5R5G	VM4H255S5ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3P150A2GLN

③ Catalog numbers shown are with 3/4" conduit openings; change 5 to 4 for 1-1/4"; e.g. VM3H070D4GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.

⑥ 175W M57 & 250W M58 Fixtures are EXPORT ONLY (EISA LAW).



METAL HALIDE PULSE, 150-200W MOGUL BASE HID



Pendant
w/ 5-1/2"
Globe & Guard



Flexible Pendant
w/ 5-1/2"
Refractor & Guard



Pendant
w/ 7-3/4"
Globe & Guard



Flexible Pendant
w/ 7-3/4"
Refractor & Guard



Pendant
w/ Enclosed Reflector

Class I, Div. 2, Groups A,B,C,D^①
Class I, Zone 2, Groups IIC, IIB, IIA
Class II, Div. 1 & 2, Groups E,F,G
Class III

Suitable for wet locations
NEMA 3, 4, 4X
IP66

US LISTED - File E10514 (Hazardous & Marine)

US Certified - File LR11713

NR Restricted Breathing Option^⑤

Class I, Zone 2 AEx nAnR
Class I, Zone 2 Ex nR

VM 150 - 200 WATT METAL HALIDE PULSE PENDANT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ^②			7-3/4" OPTIC THREAD SIZE ^②			
WATTS	ANSI	HUB SIZE ^③	VOLTAGE ^④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	3/4"	Quad Tri 480	VM3P150A2GLG	VM3P150A2R1G	VM3P150A2R5G	VM4P150A2GLG	VM4P150A2R1G	VM4P150A2R5G	VM4P156A2ERN
	M142			VM3P156A2GLG	VM3P156A2R1G	VM3P156A2R5G	VM4P156A2GLG	VM4P156A2R1G	VM4P156A2R5G	VM4P155A2ERN
				VM3P155A2GLG	VM3P155A2R1G	VM3P155A2R5G	VM4P155A2GLG	VM4P155A2R1G	VM4P155A2R5G	VM4P170A2ERN
175	M137	3/4"	Quad Tri 480	VM3P170A2GLG	VM3P170A2R1G	VM3P170A2R5G	VM4P170A2GLG	VM4P170A2R1G	VM4P170A2R5G	VM4P170A2ERN
	M152			VM3P176A2GLG	VM3P176A2R1G	VM3P176A2R5G	VM4P176A2GLG	VM4P176A2R1G	VM4P176A2R5G	VM4P176A2ERN
				VM3P175A2GLG	VM3P175A2R1G	VM3P175A2R5G	VM4P175A2GLG	VM4P175A2R1G	VM4P175A2R5G	VM4P175A2ERN
200	M136	3/4"	Quad Tri 480	VM3P200A2GLG	VM3P200A2R1G	VM3P200A2R5G	VM4P200A2GLG	VM4P200A2R1G	VM4P200A2R5G	VM4P200A2ERN
				VM3P206A2GLG	VM3P206A2R1G	VM3P206A2R5G	VM4P206A2GLG	VM4P206A2R1G	VM4P206A2R5G	VM4P206A2ERN
				VM3P205A2GLG	VM3P205A2R1G	VM3P205A2R5G	VM4P205A2GLG	VM4P205A2R1G	VM4P205A2R5G	VM4P205A2ERN

VM 150 - 200 WATT METAL HALIDE PULSE FLEXIBLE PENDANT										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ^②			7-3/4" OPTIC THREAD SIZE ^②			
WATTS	ANSI	HUB SIZE ^③	VOLTAGE ^④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	3/4"	Quad Tri 480	VM3P150F2GLG	VM3P150F2R1G	VM3P150F2R5G	VM4P150F2GLG	VM4P150F2R1G	VM4P150F2R5G	VM4P156F2ERN
	M142			VM3P156F2GLG	VM3P156F2R1G	VM3P156F2R5G	VM4P156F2GLG	VM4P156F2R1G	VM4P156F2R5G	VM4P155F2ERN
				VM3P155F2GLG	VM3P155F2R1G	VM3P155F2R5G	VM4P155F2GLG	VM4P155F2R1G	VM4P155F2R5G	VM4P170F2ERN
175	M137	3/4"	Quad Tri 480	VM3P170F2GLG	VM3P170F2R1G	VM3P170F2R5G	VM4P170F2GLG	VM4P170F2R1G	VM4P170F2R5G	VM4P170F2ERN
	M152			VM3P176F2GLG	VM3P176F2R1G	VM3P176F2R5G	VM4P176F2GLG	VM4P176F2R1G	VM4P176F2R5G	VM4P176F2ERN
				VM3P175F2GLG	VM3P175F2R1G	VM3P175F2R5G	VM4P175F2GLG	VM4P175F2R1G	VM4P175F2R5G	VM4P175F2ERN
200	M136	3/4"	Quad Tri 480	VM3P200F2GLG	VM3P200F2R1G	VM3P200F2R5G	VM4P200F2GLG	VM4P200F2R1G	VM4P200F2R5G	VM4P200F2ERN
				VM3P206F2GLG	VM3P206F2R1G	VM3P206F2R5G	VM4P206F2GLG	VM4P206F2R1G	VM4P206F2R5G	VM4P206F2ERN
				VM3P205F2GLG	VM3P205F2R1G	VM3P205F2R5G	VM4P205F2GLG	VM4P205F2R1G	VM4P205F2R5G	VM4P205F2ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3P150A2GLN

③ Catalog numbers shown are with 3/4" conduit openings; change 2 to 3 for 1"; e.g. VM3P150A3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.

LIGHTING

CERTILITE® V SERIES



METAL HALIDE PULSE, 150-200W MOGUL BASE HID



Ceiling
w/ 5-1/2"
Globe & Guard



Wall
w/ 5-1/2"
Refractor & Guard



Ceiling
w/ Enclosed Reflector



Ceiling
w/ 7-3/4"
Globe & Guard



Wall
w/ 7-3/4"
Refractor & Guard

VM 150 - 200 WATT METAL HALIDE PULSE CEILING										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE③	VOLTAGE④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	3/4"	Quad Tri 480	VM3P150X2GLG	VM3P150X2R1G	VM3P150X2R5G	VM4P150X2GLG	VM4P150X2R1G	VM4P150X2R5G	VM4P150X2ERN
	M142			VM3P156X2GLG	VM3P156X2R1G	VM3P156X2R5G	VM4P156X2GLG	VM4P156X2R1G	VM4P156X2R5G	VM4P156X2ERN
				VM3P155X2GLG	VM3P155X2R1G	VM3P155X2R5G	VM4P155X2GLG	VM4P155X2R1G	VM4P155X2R5G	VM4P155X2ERN
175	M137	3/4"	Quad Tri 480	VM3P170X2GLG	VM3P170X2R1G	VM3P170X2R5G	VM4P170X2GLG	VM4P170X2R1G	VM4P170X2R5G	VM4P170X2ERN
	M152			VM3P176X2GLG	VM3P176X2R1G	VM3P176X2R5G	VM4P176X2GLG	VM4P176X2R1G	VM4P176X2R5G	VM4P176X2ERN
				VM3P175X2GLG	VM3P175X2R1G	VM3P175X2R5G	VM4P175X2GLG	VM4P175X2R1G	VM4P175X2R5G	VM4P175X2ERN
200	M136	3/4"	Quad Tri 480	VM3P200X2GLG	VM3P200X2R1G	VM3P200X2R5G	VM4P200X2GLG	VM4P200X2R1G	VM4P200X2R5G	VM4P200X2ERN
				VM3P206X2GLG	VM3P206X2R1G	VM3P206X2R5G	VM4P206X2GLG	VM4P206X2R1G	VM4P206X2R5G	VM4P206X2ERN
				VM3P205X2GLG	VM3P205X2R1G	VM3P205X2R5G	VM4P205X2GLG	VM4P205X2R1G	VM4P205X2R5G	VM4P205X2ERN

VM 150 - 200 WATT METAL HALIDE PULSE WALL										
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE③	VOLTAGE④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	3/4"	Quad Tri 480	VM3P150B2GLG	VM3P150B2R1G	VM3P150B2R5G	VM4P150B2GLG	VM4P150B2R1G	VM4P150B2R5G	VM4P150B2ERN
	M142			VM3P156B2GLG	VM3P156B2R1G	VM3P156B2R5G	VM4P156B2GLG	VM4P156B2R1G	VM4P156B2R5G	VM4P156B2ERN
				VM3P155B2GLG	VM3P155B2R1G	VM3P155B2R5G	VM4P155B2GLG	VM4P155B2R1G	VM4P155B2R5G	VM4P155B2ERN
175	M137	3/4"	Quad Tri 480	VM3P170B2GLG	VM3P170B2R1G	VM3P170B2R5G	VM4P170B2GLG	VM4P170B2R1G	VM4P170B2R5G	VM4P170B2ERN
	M152			VM3P176B2GLG	VM3P176B2R1G	VM3P176B2R5G	VM4P176B2GLG	VM4P176B2R1G	VM4P176B2R5G	VM4P176B2ERN
				VM3P175B2GLG	VM3P175B2R1G	VM3P175B2R5G	VM4P175B2GLG	VM4P175B2R1G	VM4P175B2R5G	VM4P175B2ERN
200	M136	3/4"	Quad Tri 480	VM3P200B2GLG	VM3P200B2R1G	VM3P200B2R5G	VM4P200B2GLG	VM4P200B2R1G	VM4P200B2R5G	VM4P200B2ERN
				VM3P206B2GLG	VM3P206B2R1G	VM3P206B2R5G	VM4P206B2GLG	VM4P206B2R1G	VM4P206B2R5G	VM4P206B2ERN
				VM3P205B2GLG	VM3P205B2R1G	VM3P205B2R5G	VM4P205B2GLG	VM4P205B2R1G	VM4P205B2R5G	VM4P205B2ERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflectors); to omit guard, change ending G to N; e.g. VM3P050X2GLN

③ Catalog numbers shown are with 3/4" conduit openings, change 2 to 3 for 1"; e.g. VM3P150X3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.



METAL HALIDE PULSE, 150-200W MOGUL BASE HID



VM 150 - 200 WATT METAL HALIDE PULSE CONE

DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	3/4"	Quad Tri 480	VM3P150C2GLG	VM3P150C2R1G	VM3P150C2R5G	VM4P150C2GLG	VM4P150C2R1G	VM4P150C2R5G	VM4P150C2ERN
	M142			VM3P156C2GLG	VM3P156C2R1G	VM3P156C2R5G	VM4P156C2GLG	VM4P156C2R1G	VM4P156C2R5G	VM4P156C2ERN
				VM3P155C2GLG	VM3P155C2R1G	VM3P155C2R5G	VM4P155C2GLG	VM4P155C2R1G	VM4P155C2R5G	VM4P155C2ERN
175	M137	3/4"	Quad Tri 480	VM3P170C2GLG	VM3P170C2R1G	VM3P170C2R5G	VM4P170C2GLG	VM4P170C2R1G	VM4P170C2R5G	VM4P170C2ERN
	M152			VM3P176C2GLG	VM3P176C2R1G	VM3P176C2R5G	VM4P176C2GLG	VM4P176C2R1G	VM4P176C2R5G	VM4P176C2ERN
				VM3P175C2GLG	VM3P175C2R1G	VM3P175C2R5G	VM4P175C2GLG	VM4P175C2R1G	VM4P175C2R5G	VM4P175C2ERN
200	M136	3/4"	Quad Tri 480	VM3P200C2GLG	VM3P200C2R1G	VM3P200C2R5G	VM4P200C2GLG	VM4P200C2R1G	VM4P200C2R5G	VM4P200C2ERN
				VM3P206C2GLG	VM3P206C2R1G	VM3P206C2R5G	VM4P206C2GLG	VM4P206C2R1G	VM4P206C2R5G	VM4P206C2ERN
				VM3P205C2GLG	VM3P205C2R1G	VM3P205C2R5G	VM4P205C2GLG	VM4P205C2R1G	VM4P205C2R5G	VM4P205C2ERN

VM 150 - 200 WATT METAL HALIDE PULSE EZ ADAPTER

DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②			
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR
150	M102	⑤	Quad Tri 480	VM3P150EZGLG	VM3P150EZR1G	VM3P150EZR5G	VM4P150EZGLG	VM4P150EZR1G	VM4P150EZR5G	VM4P150EZERN
	M142			VM3P156EZGLG	VM3P156EZR1G	VM3P156EZR5G	VM4P156EZGLG	VM4P156EZR1G	VM4P156EZR5G	VM4P156EZERN
				VM3P155EZGLG	VM3P155EZR1G	VM3P155EZR5G	VM4P155EZGLG	VM4P155EZR1G	VM4P155EZR5G	VM4P155EZERN
175	M137	⑤	Quad Tri 480	VM3P170EZGLG	VM3P170EZR1G	VM3P170EZR5G	VM4P170EZGLG	VM4P170EZR1G	VM4P170EZR5G	VM4P170EZERN
	M152			VM3P176EZGLG	VM3P176EZR1G	VM3P176EZR5G	VM4P176EZGLG	VM4P176EZR1G	VM4P176EZR5G	VM4P176EZERN
				VM3P175EZGLG	VM3P175EZR1G	VM3P175EZR5G	VM4P175EZGLG	VM4P175EZR1G	VM4P175EZR5G	VM4P175EZERN
200	M136	⑤	Quad Tri 480	VM3P200EZGLG	VM3P200EZR1G	VM3P200EZR5G	VM4P200EZGLG	VM4P200EZR1G	VM4P200EZR5G	VM4P200EZERN
				VM3P206EZGLG	VM3P206EZR1G	VM3P206EZR5G	VM4P206EZGLG	VM4P206EZR1G	VM4P206EZR5G	VM4P206EZERN
				VM3P205EZGLG	VM3P205EZR1G	VM3P205EZR5G	VM4P205EZGLG	VM4P205EZR1G	VM4P205EZR5G	VM4P205EZERN

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflector); to omit guard change ending G to N; e.g. VM3P150C2GLN

③ Catalog numbers shown are with 3/4" conduit openings; change 2 to 3 for 1"; e.g. VM3P150C3GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.

⑥ VMEZA tank adapters UL "Classified" as an assembly for use between VM Tanks and EZ mounts. Order EZ mounts separately, see page L83.

LIGHTING

CERTILITE® V SERIES



METAL HALIDE PULSE, 150-200W MOGUL BASE HID



Stanchion 25°
w/ 5-1/2"
Globe & Guard



Stanchion Straight
w/ 5-1/2"
Refractor & Guard



Stanchion 25°
w/ 7-3/4"
Globe & Guard



Stanchion Straight
w/ 7-3/4"
Refractor & Guard



Stanchion 25°
w/ Enclosed Reflector

VM 150 - 200 WATT METAL HALIDE PULSE STANCHION 25° ANGLE											
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②				
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR	
150	M102	1-1/2"	Quad Tri 480	VM3P150D5GLG	VM3P150D5R1G	VM3P150D5R5G	VM4P150D5GLG	VM4P150D5R1G	VM4P150D5R5G	VM4P150D5ERN	
				VM3P156D5GLG	VM3P156D5R1G	VM3P156D5R5G	VM4P156D5GLG	VM4P156D5R1G	VM4P156D5R5G	VM4P156D5ERN	
	M142	VM3P155D5GLG		VM3P155D5R1G	VM3P155D5R5G	VM4P155D5GLG	VM4P155D5R1G	VM4P155D5R5G	VM4P155D5ERN		
175	M137	1-1/2"	Quad Tri 480	VM3P170D5GLG	VM3P170D5R1G	VM3P170D5R5G	VM4P170D5GLG	VM4P170D5R1G	VM4P170D5R5G	VM4P170D5ERN	
				VM3P176D5GLG	VM3P176D5R1G	VM3P176D5R5G	VM4P176D5GLG	VM4P176D5R1G	VM4P176D5R5G	VM4P176D5ERN	
	M152	VM3P175D5GLG		VM3P175D5R1G	VM3P175D5R5G	VM4P175D5GLG	VM4P175D5R1G	VM4P175D5R5G	VM4P175D5ERN		
200	M136	1-1/2"	Quad Tri 480	VM3P200D5GLG	VM3P200D5R1G	VM3P200D5R5G	VM4P200D5GLG	VM4P200D5R1G	VM4P200D5R5G	VM4P200D5ERN	
				VM3P206D5GLG	VM3P206D5R1G	VM3P206D5R5G	VM4P206D5GLG	VM4P206D5R1G	VM4P206D5R5G	VM4P206D5ERN	
				VM3P205D5GLG	VM3P205D5R1G	VM3P205D5R5G	VM4P205D5GLG	VM4P205D5R1G	VM4P205D5R5G	VM4P205D5ERN	

VM 150 - 200 WATT METAL HALIDE PULSE STANCHION STRAIGHT											
DESCRIPTION				5-1/2" OPTIC THREAD SIZE ②			7-3/4" OPTIC THREAD SIZE ②				
WATTS	ANSI	HUB SIZE ③	VOLTAGE ④	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	GLOBE & GUARD	TYPE I GLASS REFRACTOR & GUARD	TYPE V GLASS REFRACTOR & GUARD	ENCLOSED REFLECTOR	
150	M102	1-1/2"	Quad Tri 480	VM3P150S5GLG	VM3P150S5R1G	VM3P150S5R5G	VM4P150S5GLG	VM4P150S5R1G	VM4P150S5R5G	VM4P150S5ERN	
				VM3P156S5GLG	VM3P156S5R1G	VM3P156S5R5G	VM4P156S5GLG	VM4P156S5R1G	VM4P156S5R5G	VM4P156S5ERN	
	M142	VM3P155S5GLG		VM3P155S5R1G	VM3P155S5R5G	VM4P155S5GLG	VM4P155S5R1G	VM4P155S5R5G	VM4P155S5ERN		
175	M137	1-1/2"	Quad Tri 480	VM3P170S5GLG	VM3P170S5R1G	VM3P170S5R5G	VM4P170S5GLG	VM4P170S5R1G	VM4P170S5R5G	VM4P170S5ERN	
				VM3P176S5GLG	VM3P176S5R1G	VM3P176S5R5G	VM4P176S5GLG	VM4P176S5R1G	VM4P176S5R5G	VM4P176S5ERN	
	M152	VM3P175S5GLG		VM3P175S5R1G	VM3P175S5R5G	VM4P175S5GLG	VM4P175S5R1G	VM4P175S5R5G	VM4P175S5ERN		
200	M136	1-1/2"	Quad Tri 480	VM3P200S5GLG	VM3P200S5R1G	VM3P200S5R5G	VM4P200S5GLG	VM4P200S5R1G	VM4P200S5R5G	VM4P200S5ERN	
				VM3P206S5GLG	VM3P206S5R1G	VM3P206S5R5G	VM4P206S5GLG	VM4P206S5R1G	VM4P206S5R5G	VM4P206S5ERN	
				VM3P205S5GLG	VM3P205S5R1G	VM3P205S5R5G	VM4P205S5GLG	VM4P205S5R1G	VM4P205S5R5G	VM4P205S5ERN	

① See hazardous application data on pages L131 - L140 for limitations.

② Catalog numbers shown are with guard (except enclosed reflectors); to omit guard change ending G to N; e.g. VM3P150D5GLN

③ Catalog numbers shown are with 1-1/2" conduit openings, change 5 to 4 for 1-1/4"; e.g. VM3P150D4GLG.

④ Consult catalog logic for other available voltages.

⑤ Add suffix NR for restricted breathing; see page L84 for more information.