Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC YE



i

Part No.: 699.330.75		
Series: Kompakt 37		
MECHANICAL DATA		
Height	141 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Clear	
Housing colour	Black	
Protection category	IP65	
Connection	Cable	
cross-sectional area max	kimum 0,34mm² / 22AWG	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Cable length	2000 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature mi	nimum -20°C	
Working temperature mo	ximum +50°C	
Weight with packaging	182 g	
Product weight	149 g	
ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequ	ency 50Hz	
Operating voltage tolera	ance +/- 10%	
Rated operational voltag	ge 24 VDC	
Rated operational curren	nt 85 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	
OPTICAL DATA		
Light source	LED	
Light colour	Red Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	
ACUSTICAL DATA		
Volume (max) at 1m dist	ance 85,0 dB (A)	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i




Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC YE

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with GL	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC YE

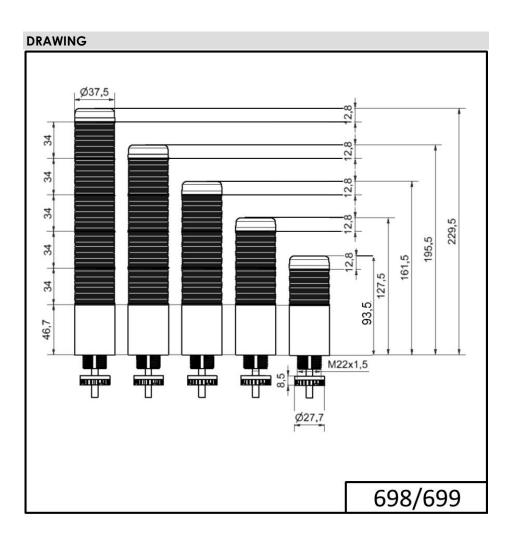

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.