

KombiSIGN 40 / DesignLOOK

Terminal element IO-Link 24VDC CL

| | |
|------------------|---------------------|
| Part No.: | 631.400.55 |
| Series: | KombiSIGN 40 |

**MECHANICAL DATA**

| | |
|------------------------------|-----------------------------|
| Height | 59 mm |
| Diameter | 40 mm |
| Materials | PC |
| Dome colour | Clear |
| Protection category | IP66 IP69K |
| Connection | IO-LINK Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 50 g |
| Product weight | 35 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 6 mA |
| Rated inrush current | 400 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |
| connectivity | IO-Link |

APPROVAL DATA

| | |
|-----------------------------|---------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with AS-I | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK

Terminal element IO-Link 24VDC CL

| | |
|-----------------------|----|
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

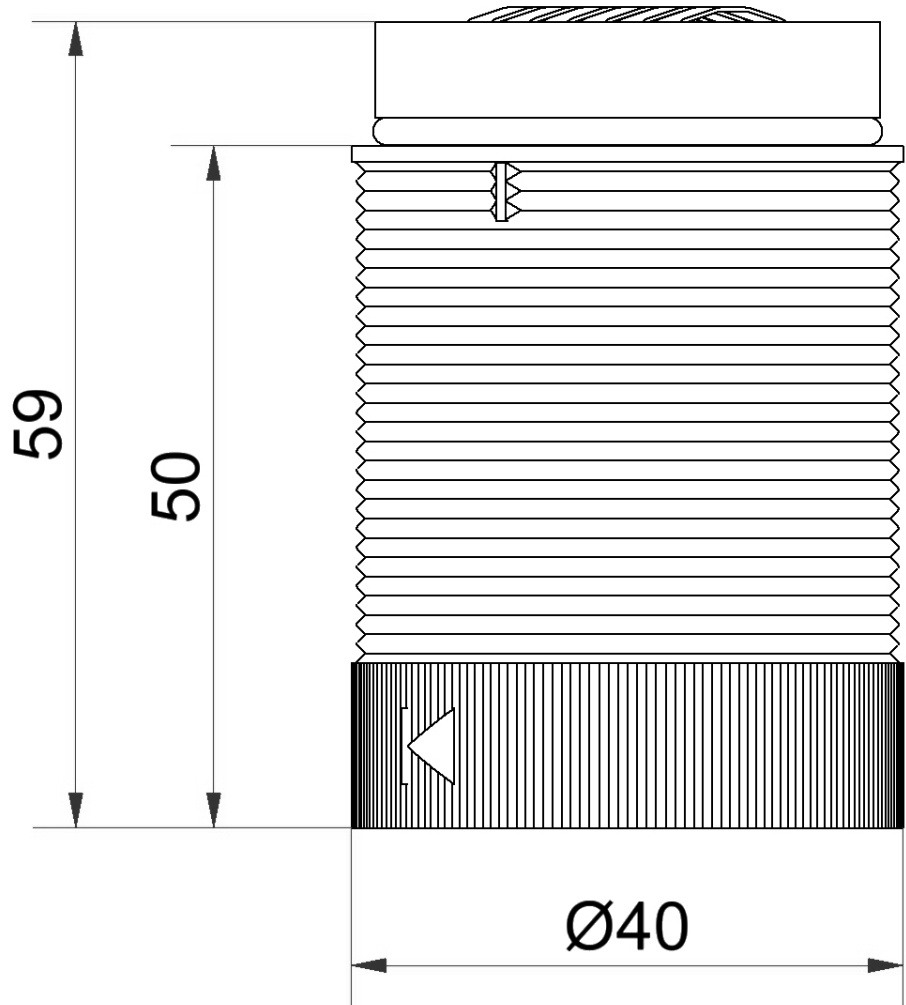

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.