

Modular Signal Towers / KombiSIGN 72
Siren element 8 tne 115-230VAC GY



| | |
|------------------|---------------------|
| Part No.: | 645.790.60 |
| Series: | KombiSIGN 72 |



| MECHANICAL DATA | |
|-----------------------------|-------|
| Height | 54 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP65 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 93 g |
| Product weight | 73 g |

| ELECTRICAL DATA | |
|-----------------------------|------------------------------|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz at 230V 60Hz at 115V |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 45 mA |
| Rated inrush current | 250 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| ACUSTICAL DATA | |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 102,0 dB (A) |
| Acoustic signal image | Multi-tone |
| Number of tones | 8 tone |
| Volume adjustable | Switch |
| Volume adjustment range | 92 - 102 dB (A) |
| Acoustic service life | 5,000 h minimum |


| APPROVAL DATA | |
|-----------------------------|-------|
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with RED directive | No |
| Conform with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Modular Signal Towers / KombiSIGN 72
Siren element 8 tne 115-230VAC GY

| | |
|---------------------------|---------|
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with GL | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

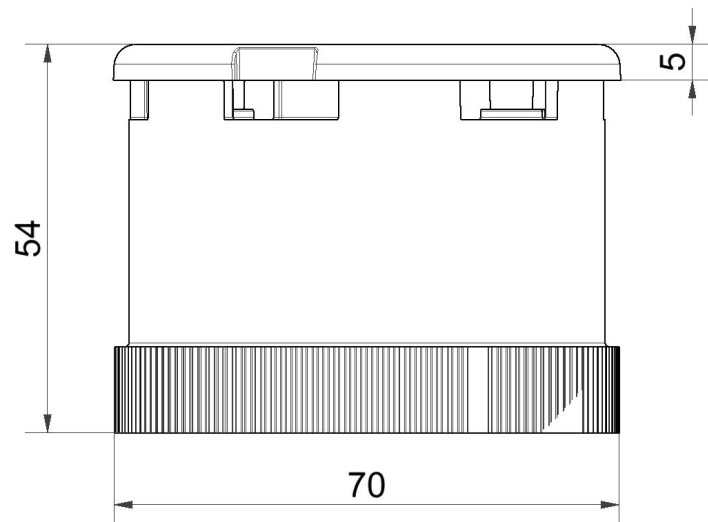

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.