

ProControl™

MODEL: PV10EP1208025

TYPICAL PERFORMANCE

Humphrey®


CONNECTIONS

| | |
|------------|------------------------|
| Pneumatic | M5x0.8 ports |
| Electrical | 18" Lead Wires (black) |
| Mounting | M3x0.5 x 6mm Dp (2x) |

FEATURES

- Each ProControl™ Valve is tested for unactuated seat leakage not to exceed 2ccm at rated pressure (Port 1 > Port 2).
- Typical hysteresis is 8% or less and measured from ascension and descension of current at a given flow point.
- Control flow with direct current to 400mA or with PWM. For best results, we recommend PWM of 5k Hz or greater.
- When testing and evaluating proportional valves, consider the Humphrey Valve Driver, model PCD. PCD accepts a 4-20mA, 0-5VDC or 0-10VDC signal and drives the proportional valve accordingly.
- PV10EP1208025 may be calibrated to specific customer parameters in some applications. Contact an application specialist for details (below).
- For additional assistance in understanding, selecting and using proportional control valves, contact a Humphrey application specialist at:
1-844-447-9009
procontrolway@humphrey-products.com

Graph depicts typical performance of Humphrey Proportional Valve Model PV10EP1208025 using a stabilized upstream pressure of 25 PSI, filtered air, at Port 1 and amperage of 0-400mA. Performance is repeatable for millions of cycles. If pressure or current exceed maximum recommended values, performance may be compromised.

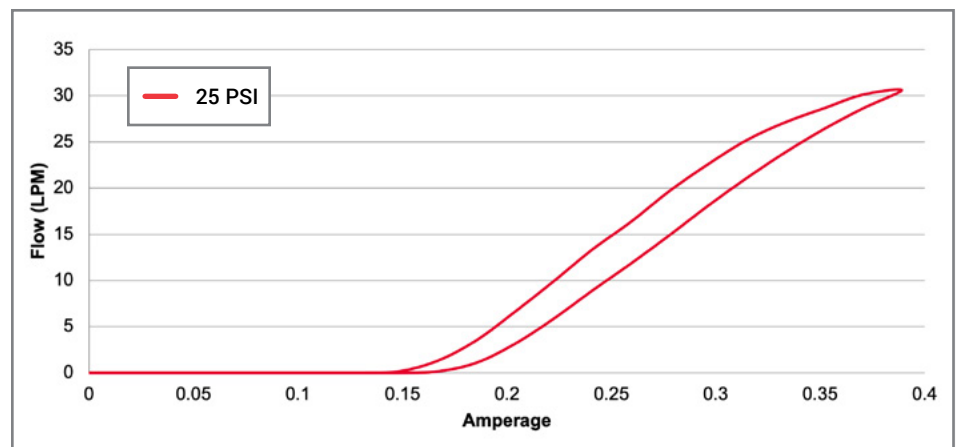

Calibrated with stabilized upstream pressure of 25 PSI to a flow of 30 SLPM @ 400mA. PV10EP1208025 will have precision control but less flow when the stabilized upstream pressure is lower than 25 PSI.

HUMPHREY-PRODUCTS.COM

A privately owned US company since 1901.
© 2021 Humphrey Products Company, Inc.
Printed in USA.

PSPCDT4421

Humphrey Products Company
5070 East N Avenue
Kalamazoo, MI 49048 USA
P: 269.381.5500
F: 269.381.4113



ACCESS ONLINE CATALOG

Obtain 3D CAD Download, CAD Viewer,
2D Dimensional Drawings, Product Images,
DataSheet PDFs, Product Accessories

Certified: ISO 9001:2015