# **ProControl**<sup>™</sup> MODEL: PV10EP2408050 **TYPICAL PERFORMANCE**



PROL

Humphre

ROCONTROL

24-032 VDC

### CONNECTIONS


Pneumatic M5x0.8 ports

18" Lead Wires (grey) M3x0.5 x 6mm Dp (2x)


## **FEATURES**

- for unactuated seat leakage not to exceed 2ccm at rated pressure (Port 1 > Port 2).
- and measured from ascension and descension of current at a given flow point.
- Control flow with direct current to 200mA or with PWM. For best results, we recommend PWM of 5k Hz or greater.
- When testing and evaluating Humphrey Valve Driver, model PCD. PCD accepts a 4-20mA. 0-5VDC or 0-10VDC signal and drives the
- PV10EP2408050 may be calibrated to specific customer parameters application specialist for details (below).
- For additional assistance in understanding, selecting and using proportional control valves, contact a Humphrey application specialist at: 1-844-447-9009 procontrolway@humphrey-products.com

Graph depicts typical performance of Humphrey Proportional Valve Model PV10EP2408050 using a stabilized upstream pressure of 50 PSI, filtered air, at Port 1 and amperage of 0-200mA. Performance is repeatable for millions of cycles. If pressure or current exceed maximum recommended values, performance may be compromised.

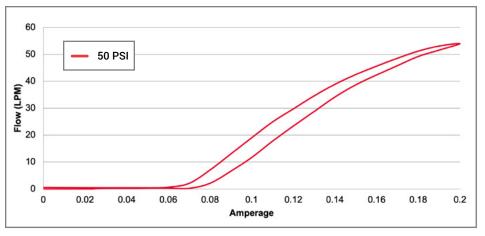

Calibrated with stabilized upstream pressure of 50 PSI to a flow of 50 SLPM @ 200mA.

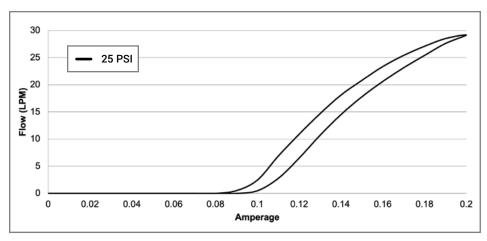

PV10EP2408050 will have precision control but less flow when upstream pressure is lower than 50 PSI. Typical curve with a stabilized upstream pressure of 25 PSI is shown.

#### **HUMPHREY-PRODUCTS.COM**

A privately owned US company since 1901. © 2021 Humphrey Products Company, Inc. Printed in USA. PSPCDT4721

Humphrey Products Company 5070 East N Avenue Kalamazoo, MI 49048 USA P: 269.381.5500 F: 269.381.4113



#### ACCESS ONLINE CATALOG

Obtain 3D CAD Download, CAD Viewer, 2D Dimensional Drawings, Product Images, DataSheet PDFs, Product Accessories