

# C7 - C7A and M7 - M7A IP67 enclosures V-TYPE lever version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CT, CTS (10A) *)	40 poles + ⊕	156
CT, CTSE (16A) *)	16 poles + ⊕	162
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

\*) can be used only in bulkhead mounting housings

## bulkhead mounting housings with 2 levers in stainless steel




## surface mounting housings with 2 levers in stainless steel



description	part No.	part No.	entry Pg	part No.	entry M
with levers and gasket, size "77.27"	<b>C71 16</b>				
with levers, size "77.27"		<b>C7P 16</b>	21	<b>M7P 16.25</b>	25
with levers, size "77.27"		<b>C7P 16.2</b>	21 x 2	<b>M7P 16.225</b>	25 x 2
with levers, high construction, size "77.27"		<b>C7AP 16.21</b>	21	<b>M7AP 16.32</b>	32
with levers, high construction, size "77.27"		<b>C7AP 16.221</b>	21 x 2	<b>M7AP 16.232</b>	32 x 2
with levers, high construction, size "77.27"		<b>C7AP 16.29</b>	29	<b>M7AP 16.40</b>	40
with levers, high construction, size "77.27"		<b>C7AP 16.229</b>	29 x 2	<b>M7AP 16.240</b>	40 x 2

### panel cut-out for bulkhead mounting housings

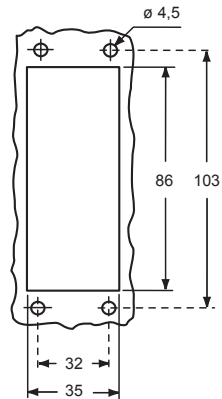

The lever, due to the vertical closing movement, offers an IP66/IP67/IP69 degree of protection (according to EN 60529) when fitted with a complete and coupled connector and used with ILME standard hoods in die cast aluminum with pegs (without adapter).

### Hoods (page 404)




### Hoods (pages 470-471)

## CAUS® Type 4/4X/12

insulating cable gland or fittings without gasket


cable gland with O-Ring gasket

### C71

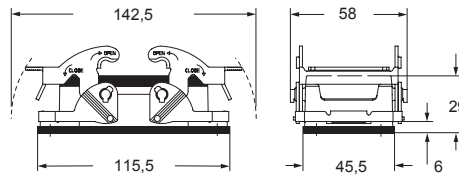

For bulkhead mounting housings, IP66/IP67/IP69 degree of protection is guaranteed for mounting on a sufficiently rigid panel; use suitable length M4 screws (negligible surface buckling when subjected to tightening couple on the fixing screws of 0,8 - 1,2 Nm or deformation caused by the weight of the complete connector). In case of insufficient rigidity use of C7.. FL counterflanges (page 443) is recommended, in which case use suitable length M4 screws and M4 (on the enclosure) and M4 (on the counterflange) flat/ spring washers with M4 locknut. In addition, the panel surface in contact with the counterflange gasket of the bulkhead mounting housings must be free from defects (deep scratches, grooves, burrs) that could negatively affect the performance of the gasket.

### C7P - C7AP and M7P - M7AP

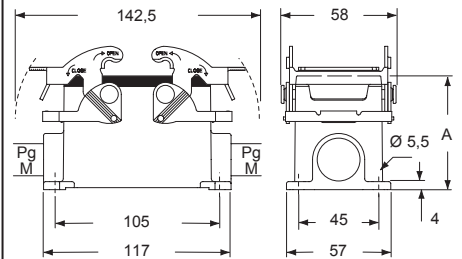

type	A
<b>C7P/M7P 16</b>	63
<b>C7AP/M7AP 16</b>	81