

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

hoods with 2 pegs



hoods with 2 pegs

M40 cable entry with 20 mm thread length



description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 16 L	21	MHO 16 L25	25				
with pegs, side entry			MHO 16 L32	32				
with pegs, side entry, high construction	CAO 16 L21	21	MAO 16 L32	32				
with pegs, side entry, high construction	CAO 16 L29	29	MAO 16 L40	40				
with pegs, side entry, high construction, without adapter ¹⁾					CFO 16 L21	21	MFO 16 L32	32
with pegs, side entry, high construction, without adapter ¹⁾					CFO 16 L29	29	MFO 16 L40	40
with pegs, top entry	CHV 16 L	21						
with pegs, top entry ²⁾			MHV 16 L25	25				
with pegs, top entry			MHV 16 L32	32				
with pegs, top entry, high construction	CAV 16 L21	21	MAV 16 L32	32				
with pegs, top entry, high construction	CAV 16 L29	29	MAV 16 L40	40				
with pegs, top entry, high construction, without adapter ¹⁾					CFV 16 L21	21	MFV 16 L32	32
with pegs, top entry, high construction, without adapter ¹⁾					CFV 16 L29	29	MFV 16 L40	40

¹⁾ enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


²⁾ can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.


Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 402 to page 410
- CV, IP65 or IP66/IP69 stainless steel lever, page 454 and 455


CHO L (CAO L) and MHO L (MAO L)

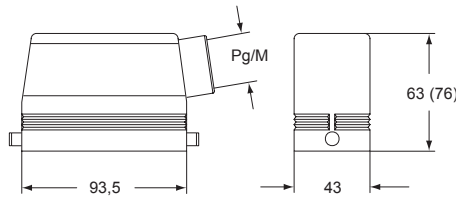


CFO L and MFO L

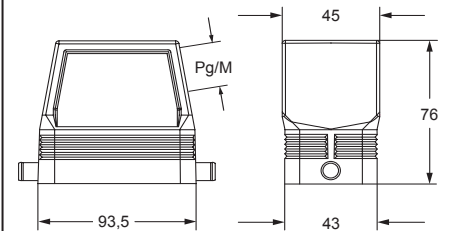

CHV L (CAV L) and MHV L (MAV L)

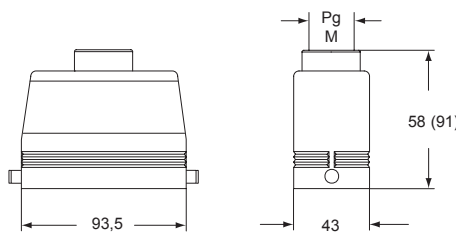

CFV L and MFV L

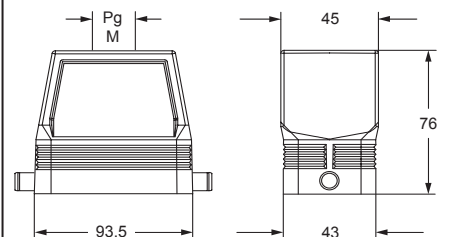

CAIUS® Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket