

# CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CD	64 poles + ⊕	72
CDD	108 poles + ⊕	81
CDS	42 poles + ⊕	-
CDSH	42 poles + ⊕	89
CNE	24 poles + ⊕	113
CSE	24 poles + ⊕	-
CSH	24 poles + ⊕	113
CSH S	24 poles + ⊕	125
CCE	24 poles + ⊕	133
CMSH	10+2 (aux) poles + ⊕	140
CMCE	10+2 (aux) poles + ⊕	141
CSS	24 poles + ⊕	151
CQE	46 poles + ⊕	171
CQEE	64 poles + ⊕	177
CX	4/8 and 6/6 poles + ⊕	204 and 206
MIXO	6 modules	262 - 317

## hoods with 2 levers



## hoods with 2 levers


M40 cable entry with 20 mm thread length




description	part No.	entry Pg	part No	entry M	part No.	entry M
with levers and gasket, side entry, high construction, without adapter <sup>1)</sup>					<b>MFO 24 G40</b>	40
with levers and gasket, top entry	<b>CHV 24 G</b>	21	<b>MHV 24 G32</b>	32		
with levers and gasket, top entry, high construction	<b>CAV 24 G</b>	21	<b>MAV 24 G25</b>	25		
with levers and gasket, top entry, high construction	<b>CAV 24 G29</b>	29	<b>MAV 24 G32</b>	32		
with levers and gasket, top entry, high construction			<b>MAV 24 G40</b>	40		
with levers and gasket, top entry, high construction, without adapter <sup>1)</sup>	<b>CFV 24 G</b>	21	<b>MFV 24 G25</b>	25		
with levers and gasket, top entry, high construction, without adapter <sup>1)</sup>	<b>CFV 24 G29</b>	29	<b>MFV 24 G32</b>	32		
with levers and gasket, top entry, high construction, without adapter <sup>1)</sup>					<b>MFV 24 G40</b>	40

<sup>1)</sup> enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


### CHV G (CAV G) and [CFV G], MHV G (MAV G) and [MFV G]

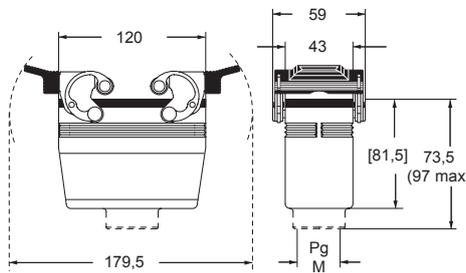

### MFO 16 G40

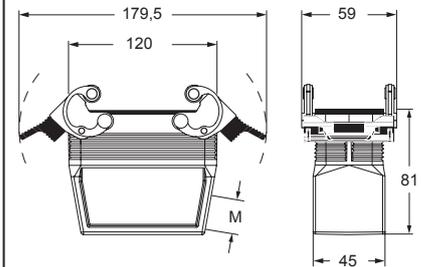

### MFV 16 G40

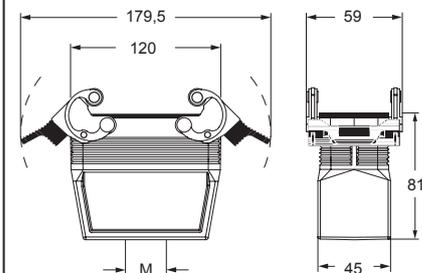

**CAVUS**® Type 4/4X/12

insulating cable gland or fittings without gasket

cable gland with O-Ring gasket