

## CH and W-TYPE for aggressive environments

## inserts

CD	80 poles + ⊕	73
CDD	144 poles + ⊕	82
CDS	54 poles + ⊕	-
CDSH	54 poles + ⊕	90
CNE	32 poles + ⊕	114
CSE	32 poles + ⊕	-
CSH	32 poles + ⊕	114
CSH S	32 poles + ⊕	126
CCE	32 poles + ⊕	134
CSS	32 poles + ⊕	152
CTSE (16A *)	32 poles + ⊕	164
CQE	64 poles + ⊕	172
CME	12+4 (aux) poles + ⊕	142
CMSH	12+4 (aux) poles + ⊕	142
CMCE	12+4 (aux) poles + ⊕	143
CP	12 poles + ⊕	179
MIXO	4 + 4 modules	262 - 317

\*) only for enclosure CHIW 32

insert dimensions:  
2 x (77,5 x 27) mm

## housings and cover




## hoods and cover




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
bulkhead mounting housing with levers and gasket	CHIW 32	--						
surface mounting housing, with levers	CHPW 32	36	MHPW 32.50	50				
cover with 4 pegs (for enclosures with 2 levers) <sup>1)</sup>	CHCW 32							
enclosure with pegs, side entry			CHOW 32	36	MHOW 32.40	40		
enclosure with pegs, top entry			CHVW 32	36	MHWV 32.40	40		
cover with 2 levers (for enclosures with 4 pegs) <sup>2)</sup>			CHCW 32 G					
enclosure with levers and gasket, top entry			CHVW 32 G	36	MHWV 32 G40	40		


panel cut-out for bulkhead mounting housings

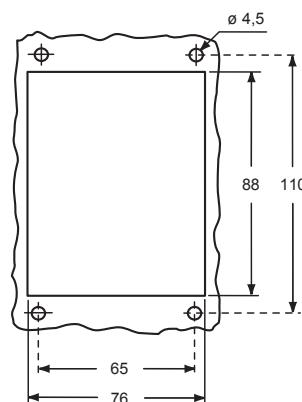


CHIW

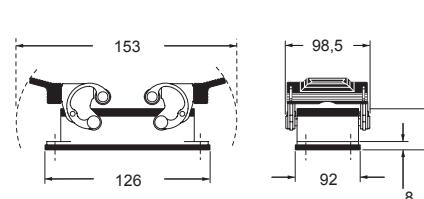


CHOW and MHOW

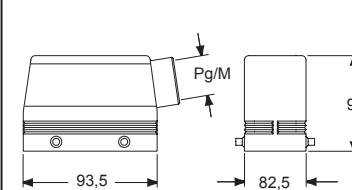


CHPW and MHPW

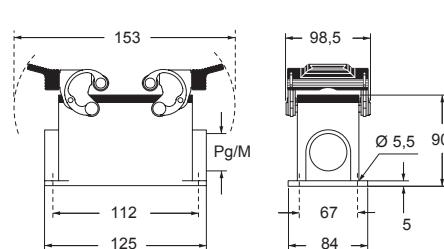


CHVW and MHVW

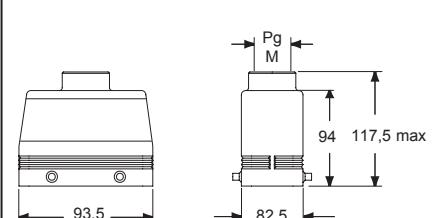


CHCW

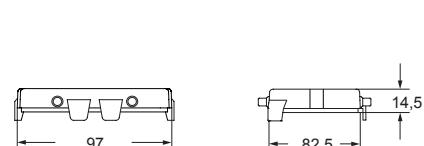


CHCW G

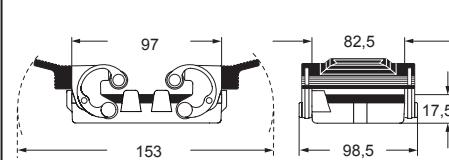

## For fixing on housings



## For fixing on hoods

**CFUS**® Type 4/4X/12Type  
4/4X/12

insulating cable gland or fittings without gasket



cable gland with O-Ring gasket