

CH - CA - CF and MH - MA - MF C-TYPE standard version

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

hoods with 2 pegs



hoods with 2 pegs M40 cable entry with 20 mm thread length



description	part No.	entry Pg	part No	entry M	part No.	entry Pg	part No.	entry M
with pegs, side entry	CHO 10 L	16	MHO 10 L20	20				
with pegs, side entry			MHO 10 L25	25				
with pegs, side entry, high construction	CAO 10 L21	21	MAO 10 L32	32				
with pegs, side entry, high construction	CAO 10 L29	29	MAO 10 L40	40				
with pegs, side entry, high construction, without adapter ¹⁾					CFO 10 L21	21	MFO 10 L32	32
with pegs, side entry, high construction, without adapter ¹⁾					CFO 10 L29	29	MFO 10 L40	40
with pegs, top entry	CHV 10 L	16						
with pegs, top entry ²⁾			MHV 10 L20	20				
with pegs, top entry			MHV 10 L25	25				
with pegs, top entry, high construction	CAV 10 L21	21	MAV 10 L32	32				
with pegs, top entry, high construction	CAV 10 L29	29	MAV 10 L40	40				
with pegs, top entry, high construction, without adapter ¹⁾					CFV 10 L21	21	MFV 10 L32	32
with pegs, top entry, high construction, without adapter ¹⁾					CFV 10 L29	29	MFV 10 L40	40

¹⁾ enclosure without adapter, threaded on the body, to be used only with a complete cable gland.


²⁾ can only be used with a complete cable gland (to be purchased separately).

IP degrees are according to the type of lever of the counterpart enclosures.


Alternatively, hoods with pegs may be coupled with fixed enclosures:

- C-TYPE, IP65 or IP66/IP69 stainless steel lever, from page 393 to page 400
- C7, IP66/IP67/IP69 stainless steel lever, page 438
- CV, IP65 or IP66/IP69 stainless steel lever, page 448 and 449


CHO L (CAO L) and MHO L (MAO L)

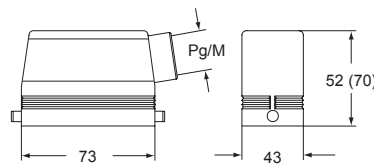


CHV L (CAV L) and MHV L (MAV L)

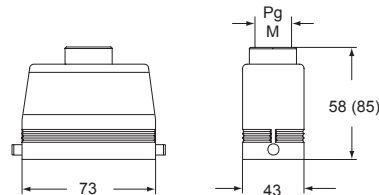

CFO L and MFO L

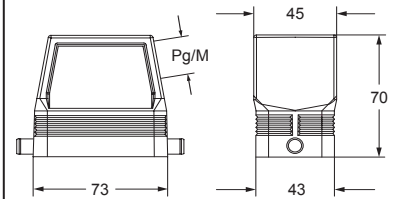

CFV L and MFV L

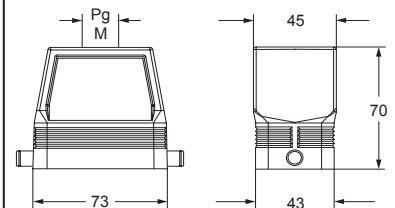

CAIUS® Type 4/4X/12



insulating cable gland or fittings without gasket



cable gland with O-Ring gasket

C-TYPE