

CV V-TYPE lever version

inserts		page:
CDD	24 poles + ⊕	76
CDS	9 poles + ⊕	-
CDSH	9 poles + ⊕	86
CDSH NC	6 poles + ⊕	95
CNE	6 poles + ⊕	110
CSE	6 poles + ⊕	-
CSH	6 poles + ⊕	110
CSH S	6 poles + ⊕	122
CCE	6 poles + ⊕	130
CSS	6 poles + ⊕	148
CT, CTSE (16A) *	6 poles + ⊕	160
CQE	10 poles + ⊕	168
MIXO	2 modules	262 - 317

*) can be used only in bulkhead mounting housings

bulkhead mounting housings with stainless steel single lever





description	part No.
with lever, gasket and cover in aluminium, size "44.27"	CVI 06 LS
with lever, gasket and cover in plastic, size "44.27"	CVI 06 LP

The enclosures ensure IP66 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.

CVI LS/LP

panel cut-out for bulkhead mounting housings

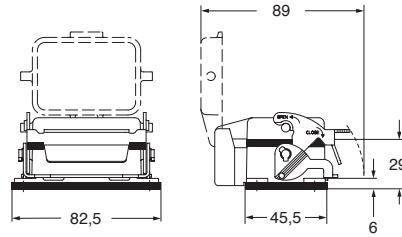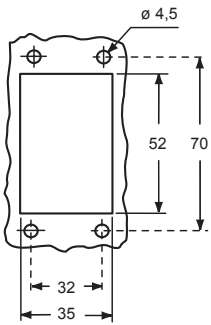

Hoods
(from page 389)



CAVUS® Type 4/4X/12
(except enclosures with plastic cover)



V-TYPE IP65/IP66