

CV V-TYPE lever version

inserts		page:
CDD	42 poles + ⊕	78
CDS	18 poles + ⊕	-
CDSH	18 poles + ⊕	87
CNE	10 poles + ⊕	111
CSE	10 poles + ⊕	-
CSH	10 poles + ⊕	111
CSH S	10 poles + ⊕	123
CCE	10 poles + ⊕	131
CMSH	3+2 (aux) poles + ⊕	136
CMCE	3+2 (aux) poles + ⊕	137
CSS	10 poles + ⊕	149
CT, CTSE (16A) *)	10 poles + ⊕	161
CQE	18 poles + ⊕	169
CX	8/24 poles + ⊕	194
MIXO	3 modules	262 - 317

*) can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel




bulkhead mounting housings with single lever in stainless steel




description	part No.	part No.
with lever and gasket, size "57.27"	CVI 10 L	
with lever, gasket and cover in aluminium, size "57.27"		CVI 10 LS
with lever, gasket and cover in plastic, size "57.27"		CVI 10 LP

☑ The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.


panel cut-out for bulkhead mounting housings

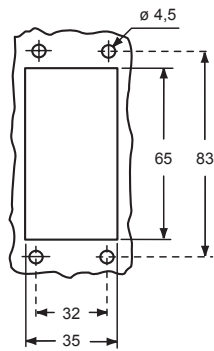

CVI L

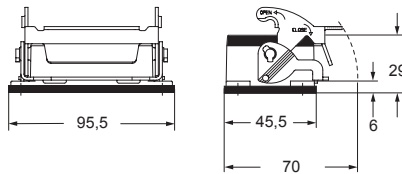

CVI LS/LP

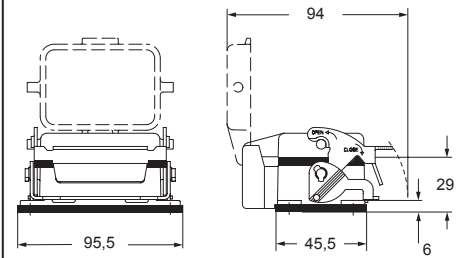

Hoods
(from page 395)



CAVUS® Type 4/4X/12



CAVUS® Type 4/4X/12
(except enclosures with plastic cover)



V-TYPE IP65/IP66