

CV and MV V-TYPE lever version

| inserts | | page: |
|---------|---------------------|-----------|
| CDD | 42 poles + ⊕ | 78 |
| CDS | 18 poles + ⊕ | - |
| CDSH | 18 poles + ⊕ | 87 |
| CNE | 10 poles + ⊕ | 111 |
| CSE | 10 poles + ⊕ | - |
| CSH | 10 poles + ⊕ | 111 |
| CSH S | 10 poles + ⊕ | 123 |
| CCE | 10 poles + ⊕ | 131 |
| CMSH | 3+2 (aux) poles + ⊕ | 136 |
| CMCE | 3+2 (aux) poles + ⊕ | 137 |
| CSS | 10 poles + ⊕ | 149 |
| CQE | 18 poles + ⊕ | 169 |
| CX | 8/24 poles + ⊕ | 194 |
| MIXO | 3 modules | 262 - 317 |

angled bulkhead mounting housings with stainless steel single lever



angled bulkhead mounting housings with stainless steel single lever



| description | part No. | part No. | entry |
|-------------|----------|----------|-------|
|-------------|----------|----------|-------|

with lever, without cable gland entry ^{1) 3)} **CVI 10 LA**

with lever, with cable gland entry, closed bulkhead ²⁾ **MVI 10 LAP32 32**

¹⁾ Flange gasket to be purchased separately.
part No.: **CR 10 MO.**

CR 10 MO
gasket



Following flange versions available on request:
73 x 73, 78 x 78, 80 x 80, 98 x 98 mm

- ²⁾ Be used only with a complete cable gland (to be purchased separately).
Versions with M 25 or Pg 21 entry on request.
- ³⁾ Kit with earthing contact, comprising a special screw and wire-terminals for 6 mm² earthing conductors (for the additional connection of the upper enclosure half) part No.: **CR MOT.**

CR MOT
kit





The enclosures ensure IP65 degree of protection when mated and locked with the closing lever.

Hoods
(from page 395)



CAIUS® Type
4/4X/12

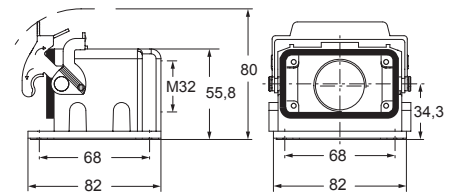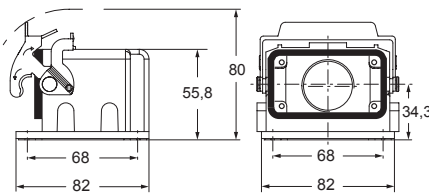

V-TYPE IP65/IP66