

Tools and accessories for crimp contacts

for contacts of inserts series:		page:
<u>CX 6/12</u> *	(40A)	197
<u>CX 6/36</u> *	(40A)	198
<u>CX 12/2</u> *	(40A)	199
MIXO	(40A)	267 - 272

* the underlined polarities indicate those contacts that require the tools shown in this page

manual crimping tool positioner - gauge



removal tool



description	part No.	part No.
crimping tool for 40A DANIELS M309 model (turret excluded)	CXPZ D	
positioner (see note) for contacts 40A (CX and RX HNM series)	CXTP 40	
"go / no go" control gauge to verify indenter closure (see note)	CXPNP	
removal tool for the extraction of contacts from the inserts for 40A contacts		CXES

Notes:


Positioner

- An interchangeable and indispensable accessory of the CXPZ D crimping tool, it precisely positions the contact where crimping is performed.


"go / no go" control gauge

- A tool used to periodically check that the crimping tool meets standard requirements.

CXPNP



CXPZ D

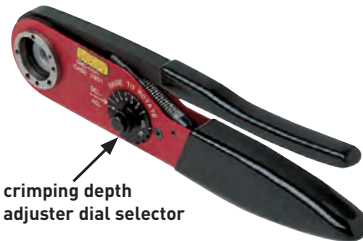

CXTP 40



CXTP 40

CONTACT	CXMA/CXFA	1.5	2.5	4.0	6.0	10
WIRE SIZE	mm ²	1,5	2,5	4	6	10
	AWG	16	14	12	10	8
SEL. NO.		5	5	5	7	8
USE WITH		M309				
		WA-27-309-EP				