


# Piloted non return valve HGL-3/8-NPT

Part number: 34879

FESTO

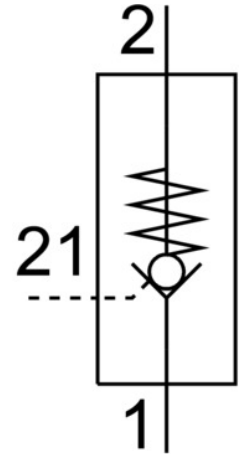

## Data sheet

| Feature                                  | Value  |
|--|--|
| Type code                                | HGL  |
| Pilot pressure MPa                       | 0.12 MPa ... 1 MPa   |
| Pilot pressure psi                       | 17.4 psi ... 145 psi   |
| Operating pressure                       | 0.02 MPa ... 1 MPa   |
| Valve function                           | Unlockable non-return function                                     |
| Pneumatic connection 1                   | 3/8 NPT  |
| Pneumatic connection 2                   | 3/8 NPT  |
| Type of mounting                         | Screw-in   |
| Standard nominal flow rate               | 0 l/min ... 900 l/min  |
| Operating pressure                       | 0.2 bar ... 10 bar   |
| Pilot pressure                           | 1.2 bar ... 10 bar   |
| Ambient temperature                      | -20 °C ... 80 °C   |
| Operating medium                         | Compressed air as per ISO 8573-1:2010 [7:4:4]                      |
| Symbol                                   | 00991456   |
| Information on operating and pilot media | Operation with oil lubrication possible (required for further use) |
| Temperature of medium                    | -20 °C ... 80 °C   |
| Note on materials                        | RoHS-compliant   |